SAMPLE SPECIFICATIONS

MODULE NO. : COG12864C016

REVISION: V1.0

DRAWING BY: JIN

APPROVED BY:

DRAWING DATE: 2010-09-30

FOR CUSTOMER'S APPROVAL

CUSTOMER	APPROVED BY	COMMENT	DATE
THE STATE OF THE S	17 - T		

History of Versions and Modifications

Version	Modifications	Date
V1.0	Generation first version	2010-09-30
		1 1
		White A
	A	1 2
	. 3)	10,12
	10, 12	KYV
	KIT .	XT //
	XX M	()
	AXA ALKIN	
	12 101	
	XX J	
1		
* XIII .		
· A		

SAMPLE SPECIFICATIONS

- LCD MODULE PHYSICAL DATA
- BLOCK DIAGRAM
- ABSOLUTE MAXIMUM RATINGS
- **ELECTRICAL CHARACTERISTICS**
- INSTRUCTION LIST
- **ELECTRO-OPTICAL CHARACTERISTICS**
- INTERFACE PIN CONNECTIONS
- SUGGESTIONS FOR USING LCD MODULES
- PACKING
- LCM DRAWING



■ LCD MODULE PHYSICAL DATA


General Description

Display Type	FSTN	
Viewing Direction	12 o'clock	
Connection Type	cog	
Operation temperature	0 °C ~ +5 0 °C	
Storage temperature	-10°C ~ +60°C	
Driving IC	UC1701	
, XX	Duty 1/64	
Driving Method	Bias 1/9	
4 101	Vop 8.7V	
Polarizer Mode	Transmissive/positive	

♦ Mechanical Description

Item	Standard Value	Unit
Number of dots	128X64 dots	
Module dimension	45.0(W) X33.0(H) X3.4(T)	mm
Viewing area	40.0(W) X 22.0(H)	mm
Active area	39.025(W) X20.98(H)	mm
Dot size	0.29(W) X 0.313 (H)	mm
Dot pitch	0.305(W) X 0.328(H)	mm
Approx. weight	TBD	g
Backlight	LED(White)	

COG 12864C016

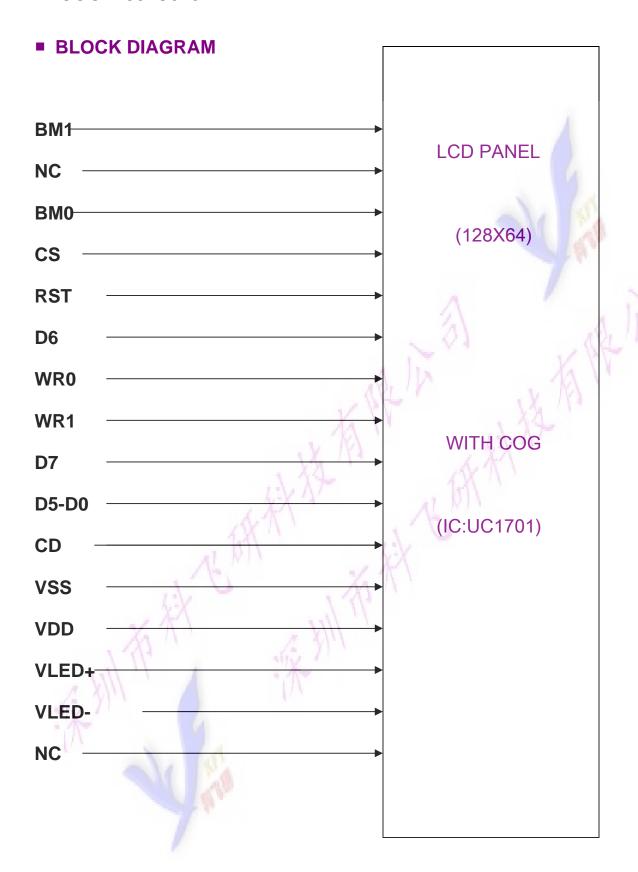

■ ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min	Max	Unit
Operating temperature	Тор	0	50	$^{\circ}$
Storage temperature	Tst	-10	60	℃
Input voltage VIN	VSS	-0.3	5.3	V
Supply voltage for logic	VDD	-0.3	5	V
Supply voltage for LCD	VLCD	-16	0.3	V
		1		-0.11

NOTE:

2. VDD>GND must be maintained.

■ ELECTRICAL CHARACTERISTICS(Vss=0V, VDD=2.4~3.6V Ta=25°C)

DC Characteristics

Item	Symbol	Condition	Min	Тур	Max	Unit
Input high voltage	VIH	(1/1 -1)	0.8VDD	-	VDD	V
Input low voltage	VIL	<u>}</u> ///-	Vss	-	0.2VDD	V
Supply voltage for logic	VDD-VSS	Ta=25℃	2.4	-	3.6	V
Operating voltage for LCD VLCD	Ta=25 ℃		-13	_	-6	V
Current consumption for LCD normal operation	IDD	VDD =3.0V	-	70	117	uA

AC Characteristics

IC DATA SHEET

INSTRUCTION LIST

IC DATA SHEET

^{1.} If the module is used above these absolute maximum ratings. It may become permanently damaged. Using the module within the following electrical characteristic conditions are also exceeded, the module will malfunction and cause poor reliability.

■ ELECTRO-OPTICAL CHARACTERISTICS

Item	Symbol	Condition	Min	Тур	Max	Unit
View angle(V)	θ	Cr ≥ 2	-35	-	+35	deg
View angle(H)	Φ	Cr ≥ 2	-35	ı	+35	deg
Contrast ratio	Cr	Ta=25°C	-	5	-	-
	Tr	Ta=25 ℃	-	200	400	ms
Response time					A	
	Td	Ta=25 ℃	-	200	800	ms

■ INTERFACE PIN CONNECTIONS

NO.	SYMBOL	FUNCTION
1	BM1	This is the parallel and serial data input swith terminal
2	NC	No connection
3	вмо	This is the MPU interface switch terminer
4	cs	Chip select PIN. "L" active
5	RST	Initialized control PIN. "L" active.
6	D6(SCL)	D6 or Serial data clock signal input terminal
7	WR0	WR(R/W) control PIN
8	WR1	RD(ENABLE) control PIN
9	D7(SDA)	D7 or Serial data clock signal input terminal
10-15	D5-D0	This is 8-bit standard MPU data bus
16	CD	Data/command control PIN
17	vss	GND
18	VDD	Power supply

19	VLED+	Anode for Backlight
20	VLED-	Cathode for Backlight
21	NC	No connection

SUGGESTIONS FOR USING LCD MODULES

Handling of LCM

- (1) The LCD screen is made of glass. Don't give excessive external shock, or drop from a high place.
- (2) If the LCD screen is damaged and the liquid crystal leaks out, do not lick and swallow. When the liquid is attach to your hand, skin, cloth etc, wash it off by using soap and water thoroughly and immediately.
- (3) Don't apply excessive force on the surface of the LCM.
- (4) If the surface is contaminated ,clean it with soft cloth. If the LCM is severely contaminated , use Isopropyl alcohol/Ethyl alcohol to clean. Other solvents may damage the polarizer . The following solvents is especially prohibited: water , ketone Aromatic solvents etc.
- (5) Exercise care to minimize corrosion of the electrode. Corrosion of the electrodes is accelerated by water droplets, moisture condensation or a current flow in a high-humidity environment.
- (6) Install the LCD Module by using the mounting holes. When mounting the LCD module make sure it is free of twisting, warping and distortion. In particular, do not forcibly pull or bend the I/O cable or the backlight cable.
- (7) Don't disassemble the LCM.
- (8) To prevent destruction of the elements by static electricity, be careful to maintain an optimum work environment.
- Be sure to ground the body when handling the LCD modules.
- Tools required for assembling, such as soldering irons, must be properly grounded.
- To reduce the amount of static electricity generated, do not conduct assembling

COG 12864C016

and other work under dry conditions.

- The LCD module is coated with a film to protect the display surface. Exercise care when peeling off this protective film since static electricity may be generated.
- (9) Do not alter, modify or change the the shape of the tab on the metal frame.
- (10) Do not make extra holes on the printed circuit board, modify its shape or change the positions of components to be attached.
- (11) Do not damage or modify the pattern writing on the printed circuit board.
- (12) Absolutely do not modify the zebra rubber strip (conductive rubber) or heat seal connector
- (13) Except for soldering the interface, do not make any alterations or modifications with a soldering iron.
- (14) Do not drop, bend or twist LCM.

Storage

(1) Store in an ambient temperature of 5 to 45 ° C, and in a relative humidity of 40% to 60%.

Don't expose to sunlight or fluorescent light.

- (2) Storage in a clean environment, free from dust, active gas, and solvent.
- (3) Store in antistatic container.

Soldering

- (1) Use the high quality solder. (60-63% tin mixed with lead)
- (2) Iron: no higher than 260° C and less than 3-4 sec during soldering.
- (3) Soldering: only to the I/O terminals.
- (4) Rewiring: no more than 3 times.

PACKING

♦ Packing Materials

NO. ITEM Dimension(LXWXH) (mm) Quantity

- 1 EPE Tray 390X220X11—3X7PCS
- 2 Inter box
- 3 Big box
- **♦** Packing Method

Step1: Put products into the tray

Step2: Tray stacking

Step3:Put products into inter box

Step4:Put products box into big box

