

G10q LED Circular Tube Datasheet



Product benefits

- Energy savings of up to 70% (compared to T8 fluorescent lamp on CCG)
- Maximum resistance to switching loads
- Correct operation even at low temperatures
- Instant 100 % light, no warm-up time
- Extremely break resistant thanks to aluminum heat sink and polycarbonate cover



Product features

- Aluminum base is excellent for heat-sink transfer and more rigid.
- Patented power supply with wide voltage to suit worldwide market with single version tube.
- Input voltage is 85-265VAC.
- Brightness is even more than conventional lamps when use is normal illumination area.
- Characterized by durable,energy saving,environmental protection and soft ray.
- No RF interference. Solid-state, high-shock and vibration resistant.
- Major reduction in power costs, Maintenance free, easy installation.
- Low power consumption, high intensity





Test Report :

x = 0.3089	主波长:	485.3nm	显色性指数	R1 = 73	R6 = 67	R11 = 74
y = 0.3216	色纯度:	9.2%	Ra = 73.1	R2 = 75	R7 = 81	R12 = 42
u = 0.1980	峰值波长:	447.8nm		R3 = 75	R8 = 65	R13 = 72
v = 0.3091	半宽度:	20.0nm	光通量	R4 = 76	R9 = -16	R14 = 86
CCT: 6216K	红色比:	13.4%	辐射功率	R5 = 74	R10 = 39	

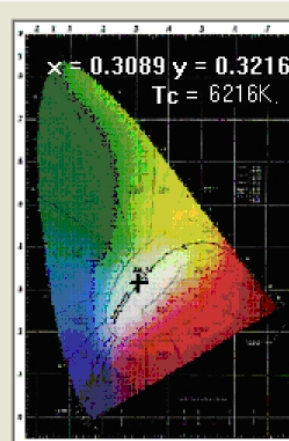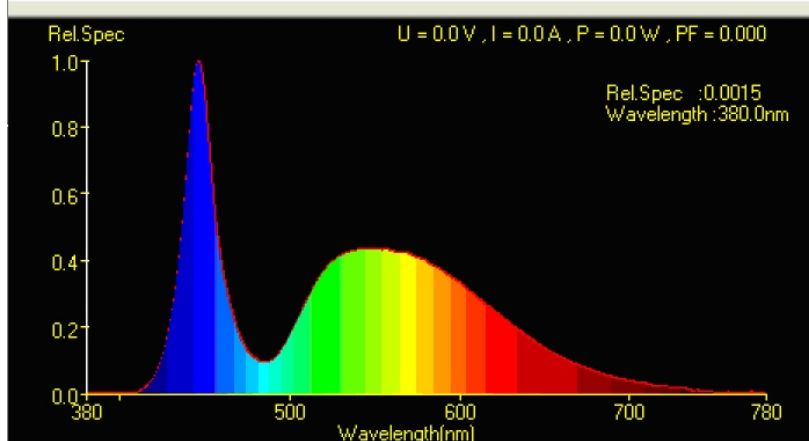


x = 0.3089	主波长:	485.3nm	显色性指数	R1 = 73	R6 = 67	R11 = 74
y = 0.3216	色纯度:	9.2%	Ra = 73.1	R2 = 75	R7 = 81	R12 = 42
u = 0.1980	峰值波长:	447.8nm		R3 = 75	R8 = 65	R13 = 72
v = 0.3091	半宽度:	20.0nm	光通量	R4 = 76	R9 = -16	R14 = 86
CCT: 6216K	红色比:	13.4%	辐射功率	R5 = 74	R10 = 39	

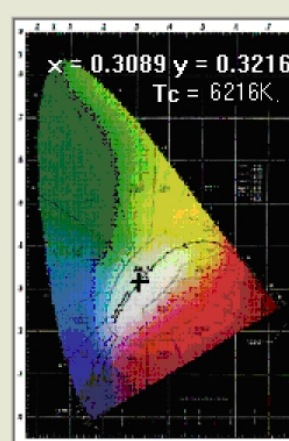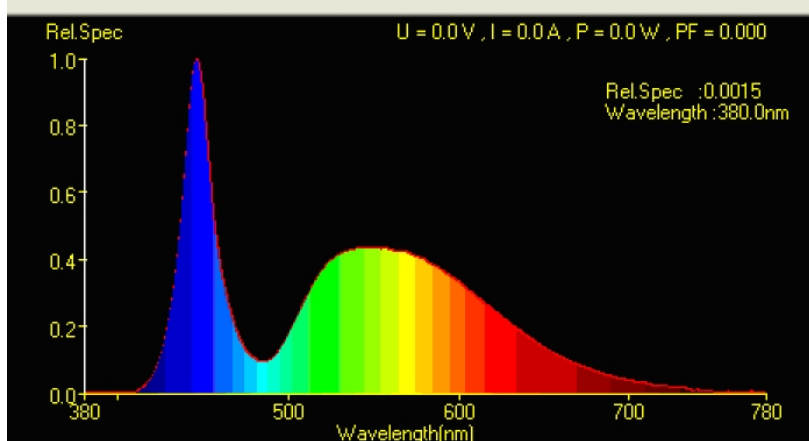

Product datasheet

Installation

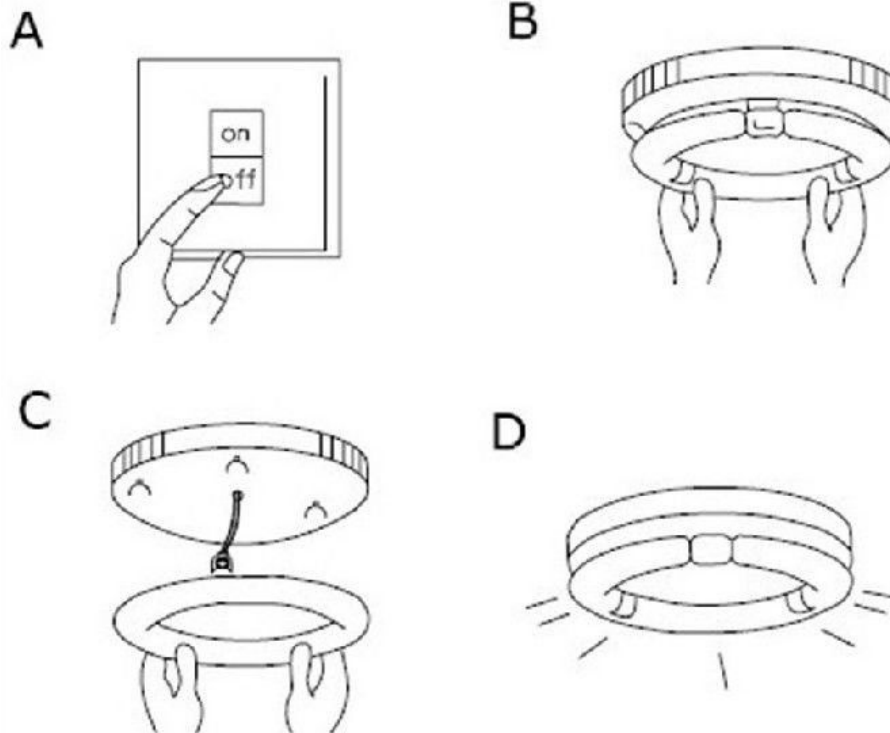**Packing Info**



References/Links

For further products and actual information concerning LED lamps see

www.hotenda.com

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Contact Us

Hotenda Technology Co.,Ltd

Marketing Center: RM1311 JiaHe Edifice B, FuTian District, ShenZhen, CN

Tel: +86 755 - 8379 9939

Fax: +86 755 - 8379 4709

E-mail: admin@hotenda.com

Skype : key.led

Factory address: Building B, Fuzhen Technologies Park, FuYuan 2nd Road, Fu Yong, Bao'an District, Shenzhen, CN

Tel: +86 755 - 8367 7937