

**T8 Tube Datasheet**



**Product benefits**

---

- Energy savings of up to 70% (compared to T8 fluorescent lamp on CCG)
- Maximum resistance to switching loads
- Correct operation even at low temperatures
- Instant 100 % light, no warm-up time
- Extremely break resistant thanks to aluminum heat sink and polycarbonate cover

**Product features**

---

- This product meets the standard of CE certification.
- With internal isolated power supply.
- Round and the elliptical tube are available.
- Use the most mature international well-known LED SMD2835 as the light source, which can ensure the led tube brightness and long lifetime, also can reduce the light decay.
- Use the high quality aluminum PCB for LED's better heat dissipation.
- High-grade PC cover with nice light transmittance (> 95%), Transparent PC cover and frosted PC cover are available.
- 180 degrees beam angle makes the lighting effect better.
- CRI (standard products) > 70, it can be over 80 if required.
- Ambient temperature: -20°C-40°C, surface temperature: 42°C-45°C
- No mercury, lead or other hazardous materials; no radiation, no electromagnetic radiation, no frequency flash, instant startup, no hurting eyes.




## Product datasheet

### Technical data

<b>Product Name</b>	Elite LED Tube
<b>Power</b>	10W / 15W / 20W / 25W
<b>LED Type</b>	SMD2835
<b>Input Voltage</b>	AC85-265V 50/60Hz
<b>CRI</b>	Ra70 or Ra80
<b>CCT</b>	2800-3200K / 4000-4750K / 5500-6500K
<b>Beam Angle</b>	180°
<b>Material</b>	PC Cover + Aluminum Tube + Aluminum PCB
<b>Applications</b>	Hotels; Conference; Offices; Factories; Hospitals; Supermarket

### Product Dimension

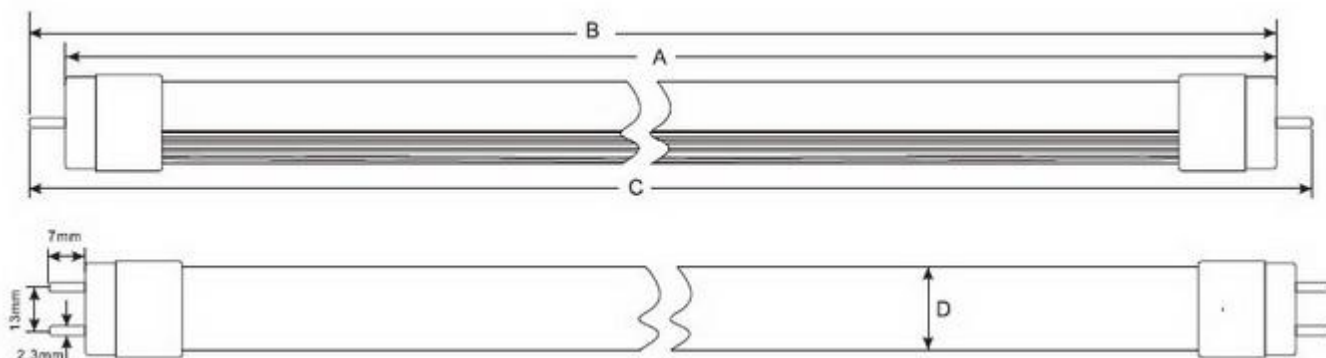

Standard Length	Dimension(mm)			
	A(max)	B(max)	C(max)	D(max)

## Product datasheet

<b>600</b>	590	597	604	26
<b>1200</b>	1199	1206	1213	
<b>1500</b>	1500	1507	1514	

**References/Links**

---

For further products and actual information concerning LED lamps see

[www.hotenda.com](http://www.hotenda.com)

**Disclaimer**

---

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

**Contact Us**

---

**Hotenda Technology Co.,Ltd**

**Marketing Center:** RM1311 JiaHe Edifice B, FuTian District, ShenZhen, CN

Tel: +86 755 - 8379 9939

Fax: +86 755 - 8379 4709

E-mail:admin@hotenda.com

Skype : key.led

**Factory address:** Building B, Fuzhen Technologies Park, FuYuan 2nd Road, Fu Yong, Bao'an District, Shenzhen, CN

Product datasheet

Tel: +86 755 - 8367 7937