

RI-08 Series Dry Reed Switch



RI-08 Series


Micro dry-reed switch hermetically sealed in a gas-filled glass envelope. Single-pole, single-throw (SPST) type, having normally open contacts, and containing two magnetically actuated reeds.

The switch is of the double-ended type and may be actuated by an electromagnet, a permanent magnet or a combination of both.

The device is intended for use in sensors, relays, pulse counters or similar devices.

RI-08 Series Features

- ◆ Can switch main voltage
- ◆ Can handle up to 40W load
- ◆ Contact layers: Ruthenium on gold
- ◆ Superior glass-to-metal seal and blade alignment

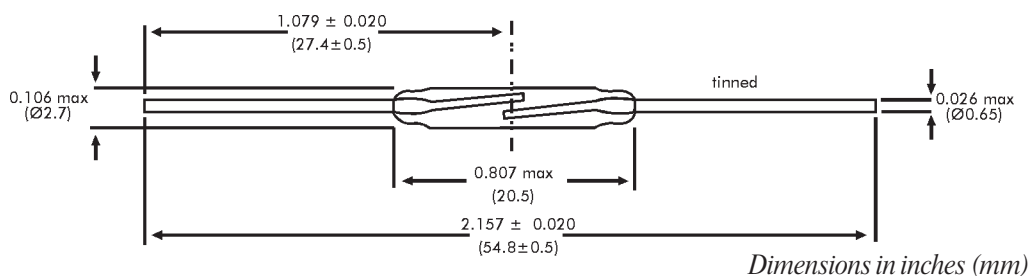

General data for all models RI-08

AT-Customization / Preformed Leads

Besides the standard models, customized products can also be supplied offering the following options:

- Operate and release ranges to customer specification
- Cropped and/or preformed leads

Coils

All characteristics are measured using the Philips Standard Coil. For definitions of the Philips Standard Coil, refer to "Application Notes" in the *Reed Switch Technical & Application Information* Section of this catalog.

Life expectancy and reliability

The life expectancy data given below are valid for a coil energized at 1.5 times the published maximum operate value for each type in the RI-08 series.

No-load conditions (operating frequency: 100 Hz)

Life expectancy: min. 10^8 operations with a failure rate of less than 10^{-9} with a confidence level of 90%.

End of life criteria:

Contact resistance $> 1\Omega$ after 2 ms

Release time > 2 ms (latching or contact sticking).

Loaded conditions (resistive load: 20 V; 500 mA; operating frequency: 125 Hz)

RI-08AA

Life expectancy: min. 10^6 operations.

End of life criteria:

Contact resistance $> 2\Omega$ after 2.5 ms

Release time > 2.5 ms (latching or contact sticking).

Switching different loads involves different life expectancy and reliability data. Further information is available on request.

Mechanical Data

Contact arrangement is normally open; lead finish is tinned; net mass is approximately 280 mg; and can be mounted in any position.

Shock

The switches are tested in accordance with "IEC 68-2-27", test Ea (peak acceleration 500 G, half sine wave; duration 11 ms). Such a shock will not cause an open switch (no magnetic field present) to close,

RI-08 Series Dry Reed Switch

Model Number			RI-08AA	RI-08A	RI-08B
Parameters	Test Conditions	Units			
Operating Characteristics					
Operate Range		AT	10.5-19	15-28	24-51
Release Range		AT	4-12	5-16	8-20.5
Operate Time - including bounce (typ.)	(energization)	ms	0.35 (24AT)	0.35 (35AT)	0.35 (64AT)
Bounce Time (typ.)	(energization)	ms	0.15 (24AT)	0.15 (35AT)	0.15 (64AT)
Release Time (max)	(energization)	μ s	30 (24AT)	30 (35AT)	30 (64AT)
Resonant Frequency (typ.)		Hz	3200	3200	3200
Electrical Characteristics					
Switched Power (max)		W	30	30	40
Switched Voltage DC (max)		V	200	200	200
Switched Voltage AC, RMS value (max)		V	200	200	250
Switched Current DC (max)		mA	750	1000	1000
Switched Current AC, RMS value (max)		mA	750	1000	1000
Carry Current DC (max)		A	1.75	2.25	3.0
Breakdown Voltage (min)		V	300	400	580
Contact Resistance (initial max)	(energization)	m Ω	120 (27 AT)	120 (27AT)	120 (36 AT)
Contact Resistance (initial typ.)	(energization)	m Ω	90 (27 AT)	90 (27 AT)	90 (36 AT)
Contact Capacitance (max)	without test coil	pF	0.20	0.20	0.20
Insulation Resistance (min)	RH $\leq$ 45%	M Ω	10 ⁶	10 ⁶	10 ⁶

nor a switch kept closed by an 80 AT coil to open.

Vibration

The switches are tested in accordance with “IEC 68-2-6”, test Fc (acceleration 10 G; below cross-over frequency 57 to 62 Hz; amplitude 0.75 mm; frequency range 10 to 2000 Hz, duration 90 minutes). Such a vibration will not cause an open switch (no magnetic field present) to close, nor a switch kept closed by an 80 AT coil to open.

Mechanical Strength

The robustness of the terminations is tested in accordance with “IEC 68-2-21”, test Ua₁ (load 40 N).

Operating and Storage Temperature

Operating ambient temperature; min: -55°C; max: +125°C. Storage temperature; min: -55°C; max: +125°C. **Note:** Temperature excursions up to 150°C may be permissible. For more information contact your nearest Coto Technology sales office.

Soldering

The switch can withstand soldering heat in accordance with “IEC 68-2-20”, test Tb, method 1B: solder bath at 350 $\pm$ 10°C for 3.5 $\pm$ 0.5 s. Solderability is tested in accordance with “IEC 68-2-20”, test Ta, method 3: solder globule temperature 235°C; ageing 1b: 4 hours steam.

Welding

The leads can be welded.

Mounting

The leads should not be bent closer than 1 mm to the glass-to-metal seals. Stress on the seals should be avoided. Care must be taken to prevent stray magnetic fields from influencing the operating and measuring conditions.