





BEST 50x50x15 MM
DIMENSIONS DRAWING




- × Bearing Type
Ball Bearings
- × Material
Impeller & Frame: Plastic (UL94V-0)
- × Lead Wires:
UL 1007 AWG#24 OR Equivalent
Red Wire Positive (+)
Black Wire Negative (-)
- × Weight: 32g (1.13 OZ)
- × Rib Type Only

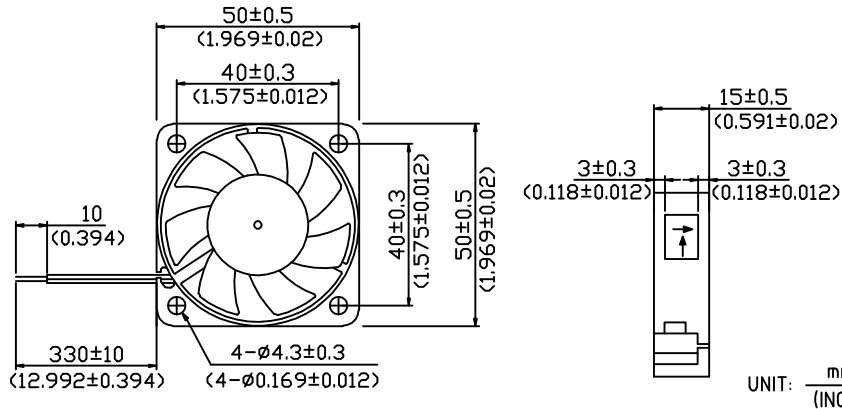

P&Q CURVE (AT RATED VOLTAGE)

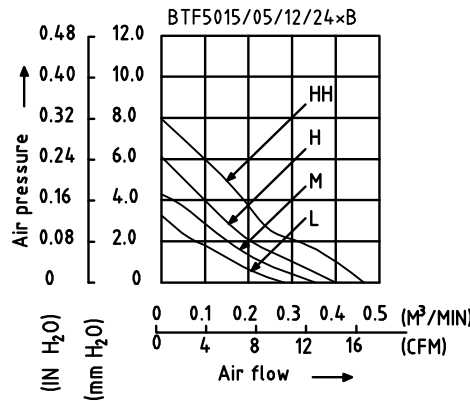

MOUNTING PANEL CUTOUT

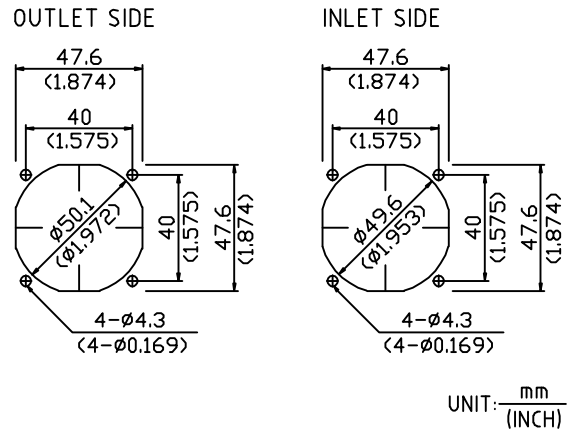

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	M ³ /MIN	CFM	mmH ₂ O	IN H ₂ O	dB-A
BTF5015L05B	-R00/-F00	5	4.5 TO 5.5	0.15	0.75	4000	0.280	9.89	3.20	0.126	24.0
BTF5015L12B	-R00/-F00	12	7.0 TO 13.8	0.06	0.72						
BTF5015L24B	-R00/-F00	24	14.0 TO 27.6	0.05	1.20						
BTF5015M05B	-R00/-F00	5	4.5 TO 5.5	0.22	1.10	4800	0.350	12.36	4.60	0.181	28.0
BTF5015M12B	-R00/-F00	12	7.0 TO 13.8	0.08	0.96						
BTF5015M24B	-R00/-F00	24	14.0 TO 27.6	0.06	1.44						
BTF5015H05B	-R00/-F00	5	4.5 TO 5.5	0.32	1.60	5600	0.400	14.13	6.10	0.240	32.0
BTF5015H12B	-R00/-F00	12	7.0 TO 13.8	0.10	1.20						
BTF5015H24B	-R00/-F00	24	14.0 TO 27.6	0.07	1.68						
BTF5015HH12B	-R00/-F00	12	7.0 TO 13.8	0.13	1.56	6400	0.460	16.24	8.00	0.315	36.0
BTF5015HH24B	-R00/-F00	24	14.0 TO 27.6	0.08	1.92						

- × Function type is optional.
- × The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.
- × Noise is measured in anechoic chamber in free air, one meter from intake side.
- × All readings are typical values at rated voltage.
- × Specifications are subject to change without notice.
- × Both of the ball bearing and the 1 ball + 1 sleeve type are available.

Address: No.88 Baihua Road, Baihuadong Village, Dalingshan Town, Dongguan, Guangdong.
 Mobile: 13823111573 13926873158
 Tel: 86-769-33217056 33217059
 FAX: 86-769-82761650
 QQ: 343315716 303294997
 E-mail: betterfan@163.com bestfan2118@163.com
 Web site: WWW.bestfan888.com