





Dongguan BEST motor co., LTD

BEST 80×80×25 MM

DIMENSIONS DRAWING

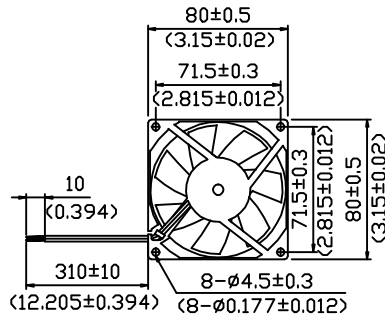

UNIT: $\frac{\text{mm}}{\text{(INCH)}}$

×Bearing Type
Ball Bearings

×Material

Impeller & Frame: Plastic (UL94V-0)

×Lead Wires:


UL 1007 AWG#24 OR Equivalent

Red Wire Positive(+)


Black Wire Negative(-)

×Weight: 80g (2.82 OZ)

P&Q CURVE (AT RATED VOLTAGE)

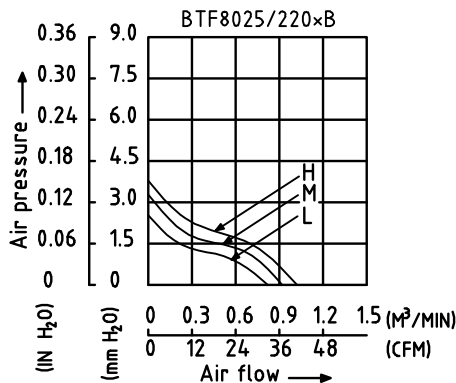

MOUNTING PANEL CUTOUT

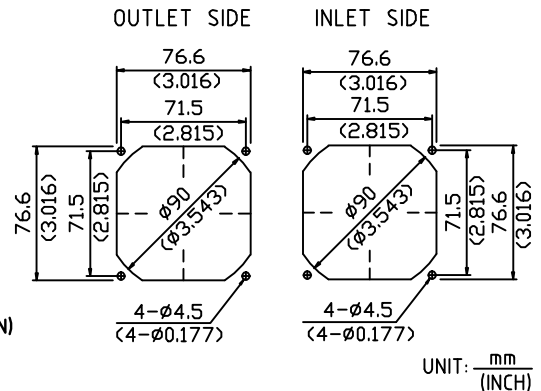

UNIT: $\frac{\text{mm}}{\text{(INCH)}}$

MODEL	Rated Voltage	Operating Voltage Range	Rated Input Power	Frequency	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
						M ³ /MIN	CFM	mmH ₂ O	IN H ₂ O	
PART NO.	VAC	VAC	Watt	Hz	R.P.M.	M ³ /MIN	CFM	mmH ₂ O	IN H ₂ O	dB-A
BTF8025L220B	220	180 TO 260	2.7	50/60	2500	0.823	29.06	2.70	0.106	26.0
BTF8025M220B	220	180 TO 260	3.5	50/60	2900	0.955	33.71	3.13	0.123	30.2
BTF8025H220B	220	180 TO 260	5.8	50/60	3300	1.086	38.36	3.56	0.140	34.4

×Function type is optional.

×The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.

×Noise is measured in anechoic chamber in free air, one meter from intake side.

×All readings are typical values at rated voltage.

×Specifications are subject to change without notice.

Address: No.88 Baihua Road, Baihuadong Village, Dalingshan Town, Dongguan, Guangdong.

Mobile: 13823111573 13926873158

Tel: 86-769-33217056 33217059

FAX: 86-769-82761650

QQ: 343315716 303294997

E-mail: betterfan@163.com bestfan2118@163.com

Web site: WWW.bestfan888.com