东莞市贝斯特电机有限公司

BEST 92×92×38 MM

DIMENSIONS DRAWING

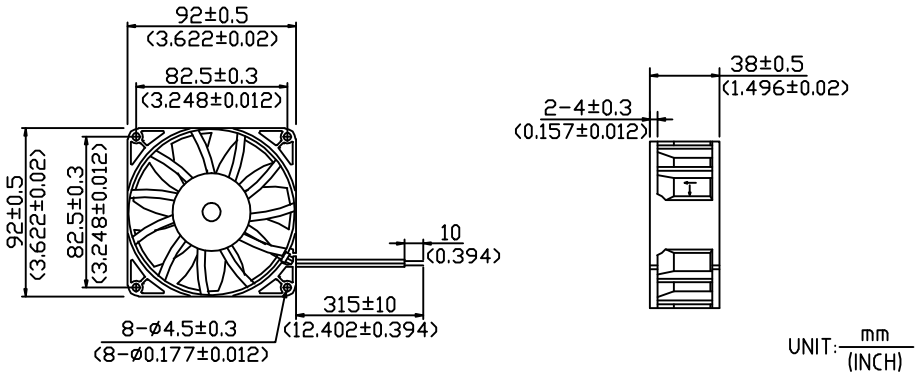

×Bearing Type
Ball Bearings
×Material
Impeller & Frame:Plastic(UL94V-0)
×Lead Wires:
UL 1007 AWG#24 OR Equivalent
Red Wire Positive(+)
Black Wire Negative(-)
×Weight:198g(6.98 OZ)

P&Q CURVE (AT RATED VOLTAGE)

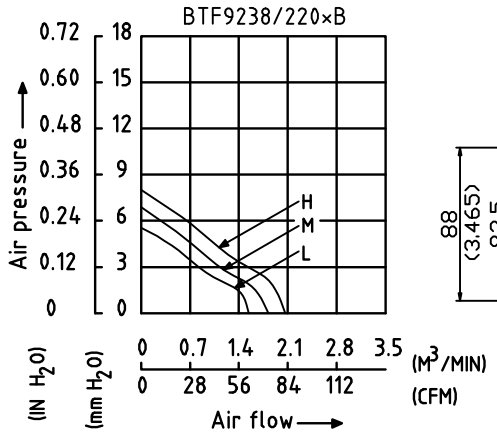

MOUNTING PANEL CUTOUT

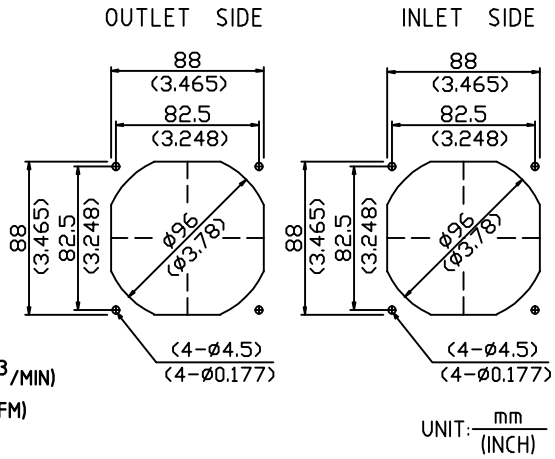

MODEL	Rated Voltage	Operating Voltage Range	Rated Input Power	Frequency	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	VAC	VAC	Watt	Hz	R.P.M.	M^3/MIN	CFM	mmH_2O	IN H_2O	dB-A
BTFA9238L220B	220	180 TO 260	5.8	50/60	2500	1.586	56.01	5.92	0.233	33.2
BTFA9238M220B	220	180 TO 260	7.5	50/60	2800	1.776	62.73	6.63	0.261	37.2
BTFA9238H220B	220	180 TO 260	11.3	50/60	3300	2.093	73.93	7.82	0.307	43.8

×Function type is optional.
×The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.
×Noise is measured in anechoic chamber in free air,one meter from intake side.
×All readings are typical values at rated voltage.
×Specifications are subject to change without notice.

Address: No.88 Baihua Road,Baihuadong Village ,Dalingshan Town,Dongguan,Guangdong.
Mobile: 13823111573 13926873158
Tel: 86-769-33217056 33217059
FAX: 86-769-82761650
QQ: 343315716 303294997
E-mail: betterfan@163.com bestfan2118@163.com
Web site: WWW.bestfan888.com