




BTF40 Series Crossflow Blowers

Brief Introductions:

Wheel: Aluminum Alloy
 Housing: Galvanized Sheet or E-Coating
 Motor Type: Brushless DC Motor
 Bearing: Ball Bearing or Bronze Sleeve
 Power Supply: DC5V,12V,18V,24V or As Request

Insulation System: Class E,B,F or H As Request
 Operating Temperature: -10°C TO +70°C
 Overheating Protection: T.P. or Z.P.
 Electrical Connection: Lead Wire
 RoHS Compliance: As Needed


Outline Dimensions (All dimensions in millimeters)

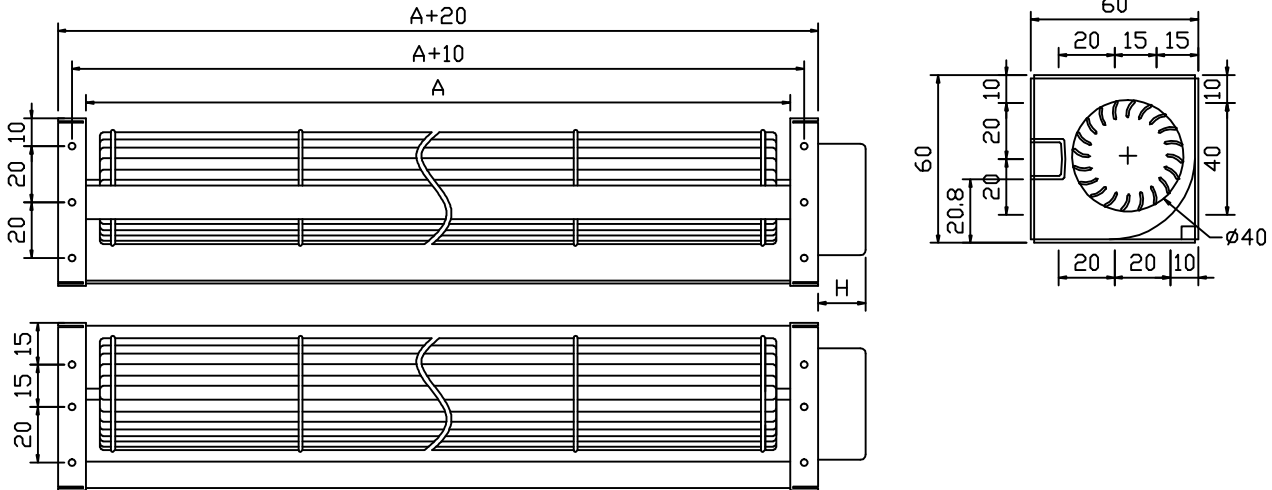

Technical Performances (based on free air condicions)

NO.	Specifications Models	Rated Volt. (VDC)	Input Current (Amps)	Output Speed (rpm)	Max.Airflow		Max.Static Pressure		Noise Level dB(A)	Dimensions	
					Metric	American	Metric	American		A	B
					(m ³ /h)	(CFM)	(PA)	(in H ₂ O)		(mm)	(mm)
1.	BTF40150-BL3725	5	0.043	2600	60	35.3	25	0.1005	37	160	40
2.	BTF40200-BL3725	12	0.045	2600	95	55.9	27	0.1086	38	200	40
3.	BTF40250-BL3725	18	0.048	2600	130	76.4	28	0.1126	41	250	40
4.	BTF40300-BL3725	24	0.050	2600	160	94.1	28	0.1126	43	300	40

Charecteristics Curve

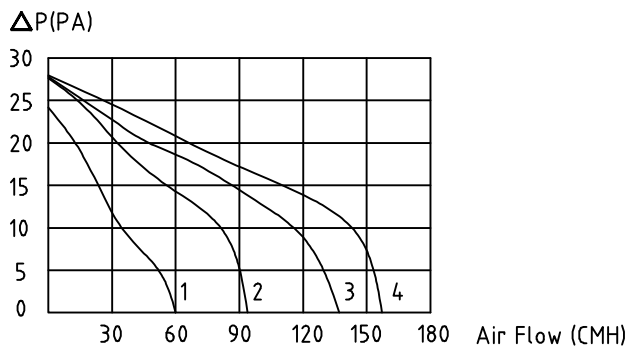

- ×Function type is optional.
- ×The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.
- ×Noise is measured in anechoic chamber in free air,one meter from intake side.
- ×All readings are typical values at rated voltage.
- ×Specifications are subject to change without notice.

Address: No.88 Baihua Road,Baihuadong Village ,Dalingshan Town,Dongguan,Guangdong.
 Mobile: 13823111573 13926873158
 Tel: 86-769-33217056 33217059
 FAX: 86-769-82761650
 QQ: 343315716 303294997
 E-mail: betterfan@163.com bestfan2118@163.com
 Web site: WWW.bestfan888.com