




Dongguan BEST motor co., LTD

BEST 40x40x10 MM


DIMENSIONS DRAWING

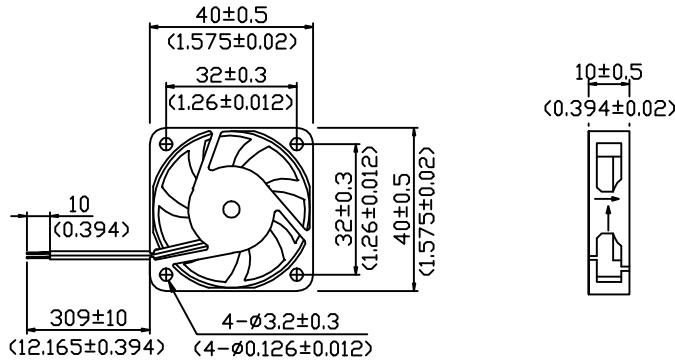


UNIT: $\frac{\text{mm}}{\text{(INCH)}}$

- ×Bearing Type
Ball Bearings
- ×Material
Impeller & Frame: Plastic(UL94V-0)
- ×Lead Wires:
UL 1007 AWG#28 OR Equivalent
Red Wire Positive(+)
Black Wire Negative(-)
- ×Weight:14.5g(0.51 OZ)
- ×Rib Type Only

P&Q CURVE (AT RATED VOLTAGE)

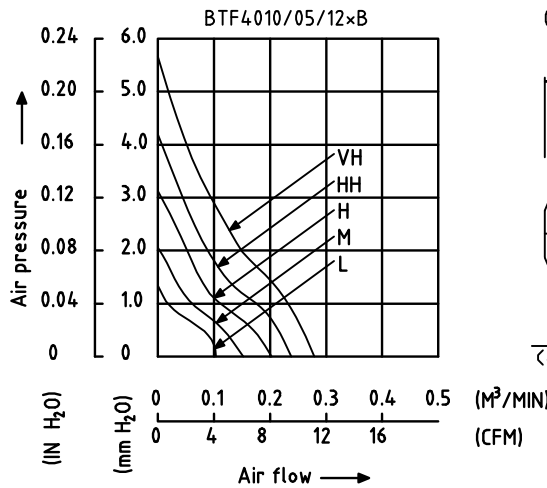

MOUNTING PANEL CUTOUT

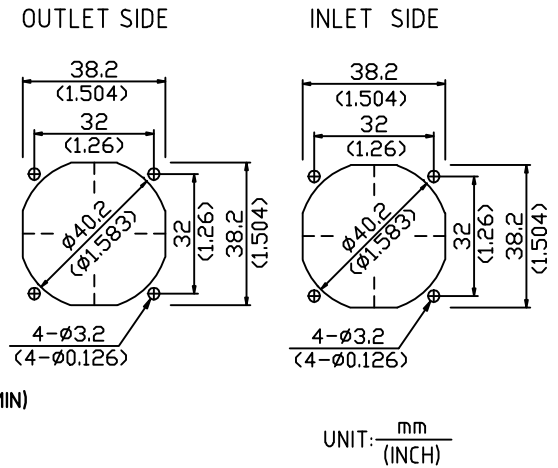

UNIT: $\frac{\text{mm}}{\text{(INCH)}}$

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	M ³ /MIN	CFM	mmH ₂ O	IN H ₂ O	dB-A
BTF4010L05B	-R00/-F00	5	4.5 TO 5.5	0.07	0.35	4000	0.106	3.74	1.45	0.057	20.5
BTF4010L12B	-R00/-F00	12	9.0 TO 13.8	0.05	0.60						
BTF4010M05B	-R00/-F00	5	4.5 TO 5.5	0.10	0.50	5000	0.167	5.90	2.24	0.088	24.5
BTF4010M12B	-R00/-F00	12	7.0 TO 13.8	0.06	0.72						
BTF4010H05B	-R00/-F00	5	4.5 TO 5.5	0.13	0.65	6000	0.196	6.92	3.28	0.129	28.5
BTF4010H12B	-R00/-F00	12	7.0 TO 13.8	0.08	0.96						
BTF4010HH05B	-R00/-F00	5	4.5 TO 5.5	0.19	0.95	7000	0.229	8.09	4.42	0.174	33.0
BTF4010HH12B	-R00/-F00	12	7.0 TO 13.8	0.10	1.20						
BTF4010VH12B	-R00/-F00	12	7.0 TO 13.8	0.15	1.80	8000	0.268	9.46	5.76	0.227	37.5

- ×Function type is optional.
- ×The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.
- ×Noise is measured in anechoic chamber in free air,one meter from intake side.
- ×All readings are typical values at rated voltage.
- ×Specifications are subject to change without notice.

Address: No.88 Baihua Road,Baihuadong Village ,Dalingshan Town,Dongguan,Guangdong.

Mobile: 13823111573 13926873158

Tel: 86-769-33217056 33217059

FAX: 86-769-82761650

QQ: 343315716 303294997

E-mail: betterfan@163.com bestfan2118@163.com

Web site: WWW.bestfan888.com