




# Dongguan BEST motor co., LTD


BEST 50x50x15 MM

## DIMENSIONS DRAWING

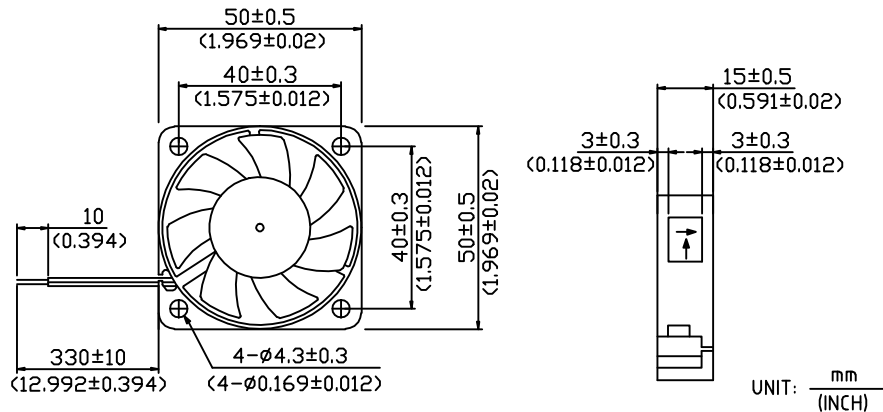


- ×Bearing Type  
Ball Bearings
- ×Material  
Impeller & Frame:Plastic(UL94V-0)
- ×Lead Wires:  
UL 1007 AWG#24 OR Equivalent  
Red Wire Positive(+)  
Black Wire Negative(-)
- ×Weight:32g(1.13 OZ)
- ×Rib Type Only

## P&Q CURVE (AT RATED VOLTAGE )

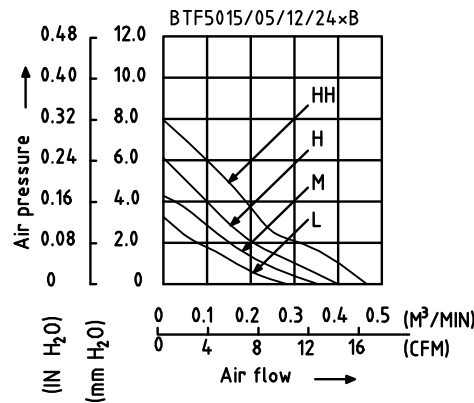

## MOUNTING PANEL CUTOUT

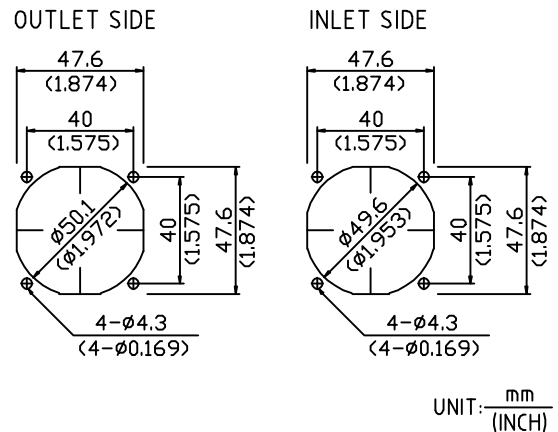

MODEL		Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	M <sup>3</sup> /MIN	CFM	mmH <sub>2</sub> O	IN H <sub>2</sub> O	dB-A
BTF5015L05B	-R00/-F00	5	4.5 TO 5.5	0.15	0.75	4000	0.280	9.89	3.20	0.126	24.0
BTF5015L12B	-R00/-F00	12	7.0 TO 13.8	0.06	0.72						
BTF5015L24B	-R00/-F00	24	14.0 TO 27.6	0.05	1.20						
BTF5015M05B	-R00/-F00	5	4.5 TO 5.5	0.22	1.10	4800	0.350	12.36	4.60	0.181	28.0
BTF5015M12B	-R00/-F00	12	7.0 TO 13.8	0.08	0.96						
BTF5015M24B	-R00/-F00	24	14.0 TO 27.6	0.06	1.44						
BTF5015H05B	-R00/-F00	5	4.5 TO 5.5	0.32	1.60	5600	0.400	14.13	6.10	0.240	32.0
BTF5015H12B	-R00/-F00	12	7.0 TO 13.8	0.10	1.20						
BTF5015H24B	-R00/-F00	24	14.0 TO 27.6	0.07	1.68						
BTF5015HH12B	-R00/-F00	12	7.0 TO 13.8	0.13	1.56	6400	0.460	16.24	8.00	0.315	36.0
BTF5015HH24B	-R00/-F00	24	14.0 TO 27.6	0.08	1.92						

- ×Function type is optional.
- ×The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.
- ×Noise is measured in anechoic chamber in free air,one meter from intake side.
- ×All readings are typical values at rated voltage.
- ×Specifications are subject to change without notice.
- ×Both of the ball bearing and the 1 ball + 1 sleeve type are available.

Address: No.88 Baihua Road,Baihuadong Village ,Dalingshan Town,Dongguan,Guangdong.  
 Mobile: 13823111573 13926873158  
 Tel: 86-769-33217056 33217059  
 FAX: 86-769-82761650  
 QQ: 343315716 303294997  
 E-mail: betterfan@163.com bestfan2118@163.com  
 Web site: WWW.bestfan888.com