



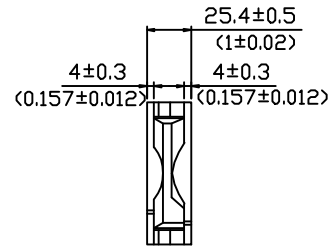

Dongguan BEST motor co., LTD

BEST 60×60×25 MM


DIMENSIONS DRAWING

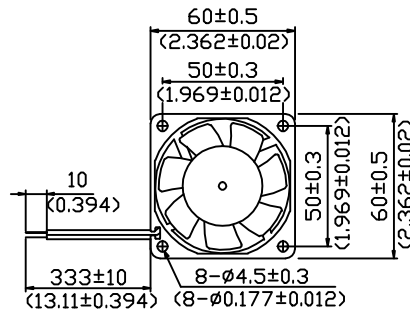


UNIT: $\frac{\text{mm}}{\text{(INCH)}}$

- ×Bearing Type
Ball Bearings
- ×Material
Impeller & Frame: Plastic(UL94V-0)
- ×Lead Wires:
UL 1007 AWG#24 OR Equivalent
Red Wire Positive(+)
Black Wire Negative(-)
- ×Weight: 80g(2.82 OZ)

P&Q CURVE (AT RATED VOLTAGE)

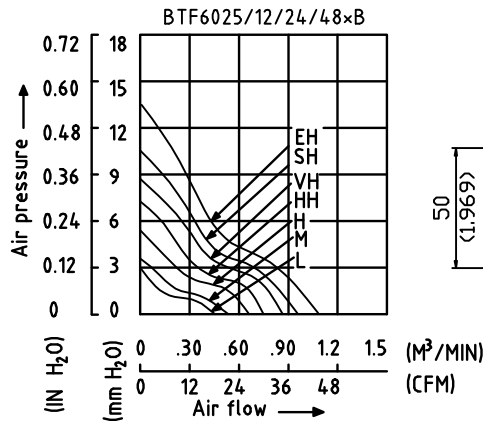

MOUNTING PANEL CUTOUT

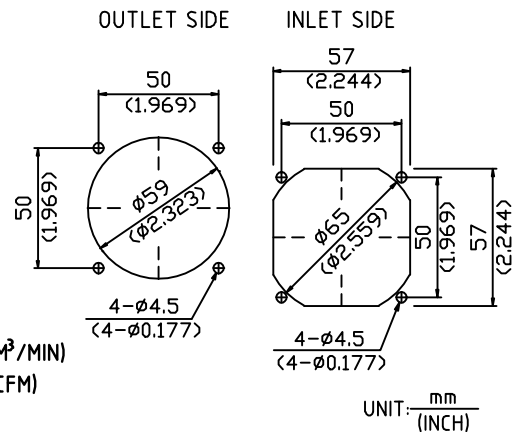

UNIT: $\frac{\text{mm}}{\text{(INCH)}}$

MODEL			Rated Voltage	Operating Voltage Range	Rated Current	Rated Input Power	Speed	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	REV.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	M³/MIN	CFM	mmH ₂ O	IN H ₂ O	dB-A
BTF6025L12B	-A	-R00/-F00	12	4.0 TO 13.8	0.08	0.96	3100	0.476	16.81	2.86	0.113	26.5
BTF6025L24B	-A	-R00/-F00	24	14.0 TO 27.6	0.06	1.44						
BTF6025M12B	-A	-R00/-F00	12	4.0 TO 13.8	0.13	1.56	3600	0.560	19.78	3.93	0.155	31.0
BTF6025M24B	-A	-R00/-F00	24	14.0 TO 27.6	0.07	1.68						
BTF6025H12B	-A	-R00/-F00	12	4.0 TO 13.8	0.14	1.68	4250	0.662	23.38	5.35	0.211	34.0
BTF6025H24B	-A	-R00/-F00	24	14.0 TO 27.6	0.09	2.16						
BTF6025HH12B	-A	-R00/-F00	12	4.0 TO 13.8	0.17	2.04	5000	0.780	27.55	7.47	0.294	40.0
BTF6025HH24B	-A	-R00/-F00	24	14.0 TO 27.6	0.11	2.64						
BTF6025HH48B	-A	-R00/-F00	48	28.0 TO 56.0	0.08	3.84	5500	0.863	30.48	8.76	0.345	42.5
BTF6025VH12B	-A	-R00/-F00	12	4.0 TO 13.8	0.23	2.76						
BTF6025VH24B	-A	-R00/-F00	24	14.0 TO 27.6	0.14	3.36	6000	0.967	34.15	10.73	0.422	44.5
BTF6025VH48B	-A	-R00/-F00	48	28.0 TO 56.0	0.09	4.32						
BTF6025SH12B	-A	-R00/-F00	12	4.0 TO 13.8	0.27	3.24	6800	1.086	38.35	13.81	0.544	46.5
BTF6025SH24B	-A	-R00/-F00	24	14.0 TO 27.6	0.17	4.08						
BTF6025SH48B	-A	-R00/-F00	48	28.0 TO 56.0	0.11	5.28						
BTF6025EH12B	-A	-R00/-F00	12	4.0 TO 13.8	0.38	4.56						
BTF6025EH24B	-A	-R00/-F00	24	14.0 TO 27.6	0.24	5.76						
BTF6025EH48B	-A	-R00/-F00	48	28.0 TO 56.0	0.14	6.72						

- ×Function type is optional.
- ×The max. air flow and the speed are measured in free air ; max.air pressure is measured at zero air flow.
- ×Noise is measured in anechoic chamber in free air,one meter from intake side.
- ×All readings are typical values at rated voltage.
- ×Specifications are subject to change without notice.

Address: No.88 Baihua Road,Baihuadong Village ,Dalingshan Town,Dongguan,Guangdong.
 Mobile: 13823111573 13926873158
 Tel: 86-769-33217056 33217059
 FAX: 86-769-82761650
 QQ: 343315716 303294997
 E-mail: betterfan@163.com bestfan2118@163.com
 Web site: WWW.bestfan888.com