




■ Package Dimensions:

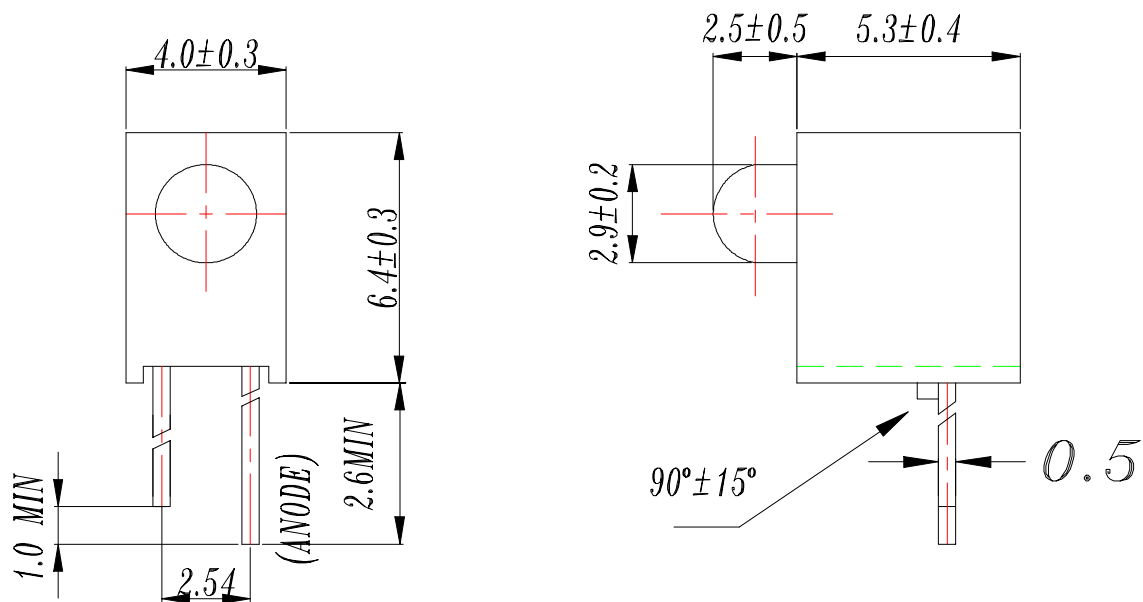

■ Notes:

- 1.All dimensions are in millimeters, tolerance is 0.25mm except being specified
- 2.Lead spacing is measured where the lead emerge from the package

LED PART NO.	Chip		Lens Color
	Material	Emitted Color	
264-10SYGC/S530-E1	AlGaInP	Super Yellow Green	Water Clear

Office : 7C Building, Lian Hua Port Industrial District, Lian Hua Shan
 Bonded Pricessing Zone Pan Yu, Guang Zhou, China

TEL : (020)84860913,84860914

FAX : (020)84860600

http : //www.everlight.com

T02549.50000125



Device Number : CDAE-021-042 REV: 1

PART NO. : A214B/SYGC/F182-53-R ECN : Page: 2 / 6

■ Descriptions:

- 1.ARRAY=Plastic Holder+Combinations of Lamps
- 2.The array will easily mount the applicable lamps on any panel up to

■ Features:

- 1.Low power consumption
- 2.High efficiency and low cost
- 3.Good control and free combinations on the colors of LED lamps
- 5.Good lock and easy to assembly
- 6.Stackable and easy to assembly
- 7.Stackable vertically and easy to assembly
- 8.Versatile mounting on P.C board or panel
- 9.Stackable horizontally and easy to assembly

■ Applications:

- 1.Used as indicators of indicating the Degree, Functions, Positions etc, in electronic instruments.




EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-021-042 REV.: 1

PART NO. : A214B/SYGC/F182-53-R ECN : _____ Page: 3 / 6

■ LED LAMP ARRAYS selection guide:

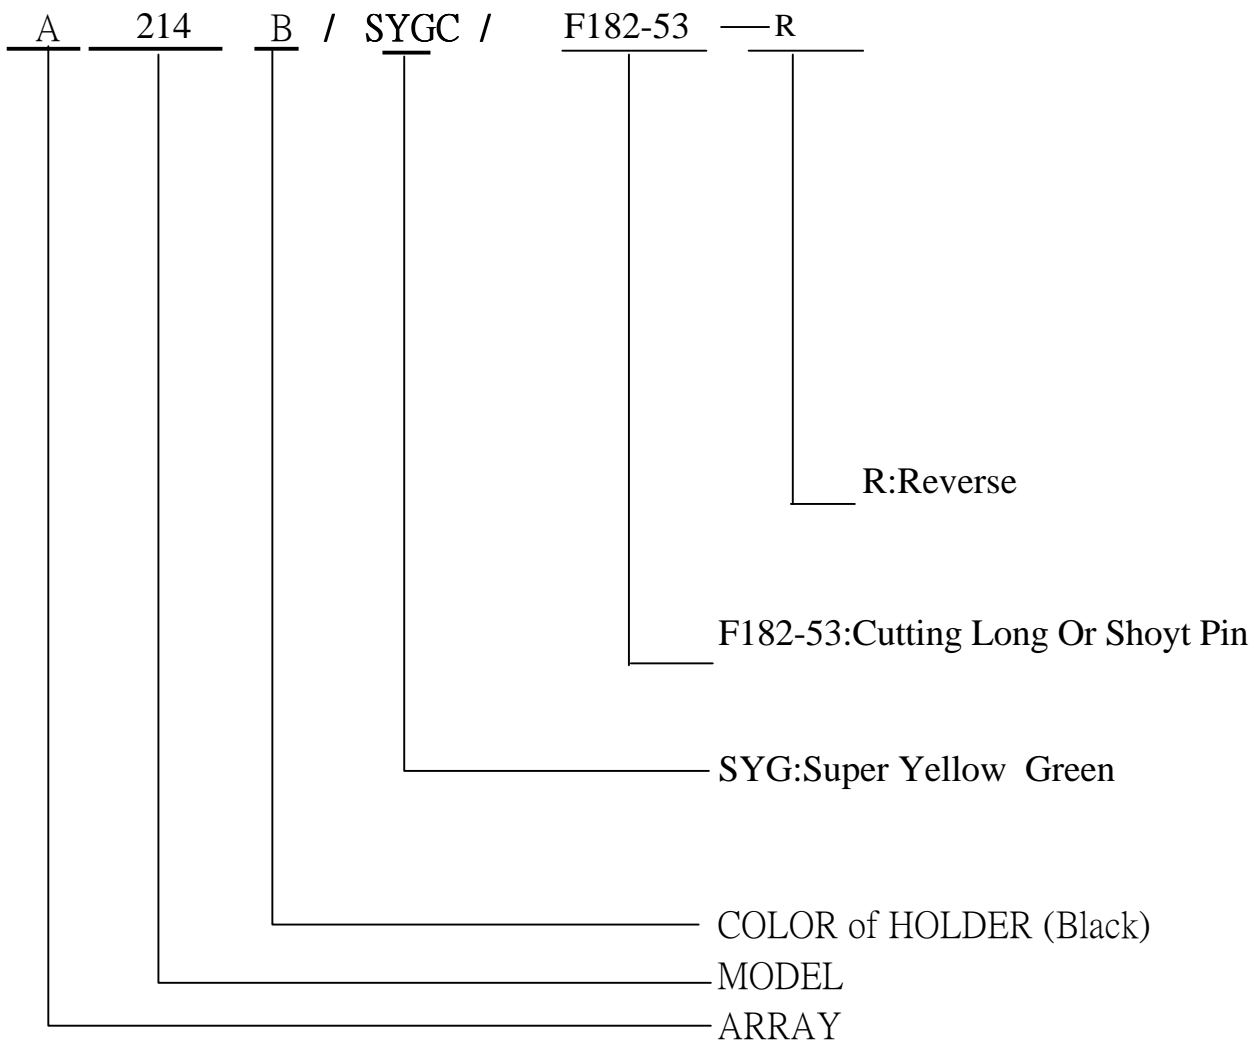



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-021-042 REV.: 1

PART NO. : A214B/SYGC/F182-53-R ECN : Page: 4/6

■ Absolute Maximum Ratings at Ta = 25°C

Parameter	Symbol	Rating	Unit
Forward Current	IF	25	mA
Operating Temperature	Topr	-40 to +85	°C
Storage Temperature	Tstg	-40 to +100	°C
Soldering Temperature	Tsol	260 ± 5	°C
Electrostatic Discharge	ESD	2000	V
Power Dissipation	Pd	60	mW
Peak Forward Current(Duty 1/10 @ 1KHz)	IF(Peak)	160	mA
Reverse Voltage	VR	5	V

■ Electronic Optical Characteristics :

Parameter	Symbol	Min.	Typ.	Max	Unit	Condition
Luminous Intensity	Iv	10	20	/	mcd	IF= 20 mA
Viewing Angle	2θ 1/2	/	30	/	deg	IF= 20 mA
Peak Wavelength	λ p	/	575	/	nm	IF= 20 mA
Dominant Wavelength	λ d	/	573	/	nm	IF= 20 mA
Spectrum Radiation Bandwidth	△ λ	/	20	/	nm	IF= 20 mA
Forward Voltage	VF	/	2.0	2.4	V	IF= 20 mA
Reverse Current	IR	/	/	10	μ A	VR= 5 V









EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-021-042 REV.: 1

PART NO. : A214B/SYGC/F182-53-R ECN : _____ Page: 5/6

■ Typical Electro-Optical Characteristic Curves:

(SYG)

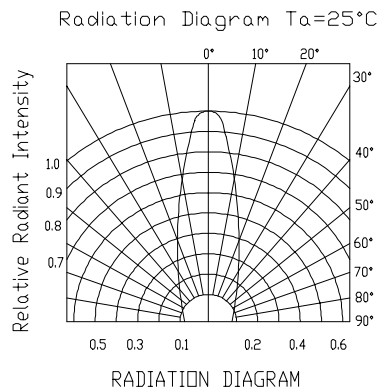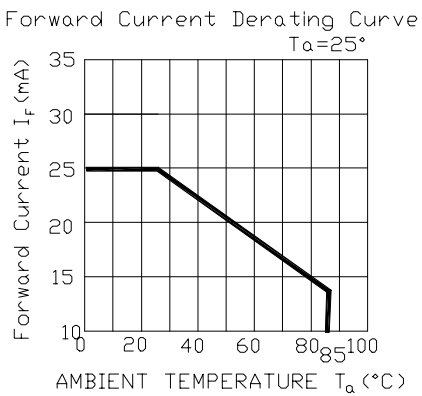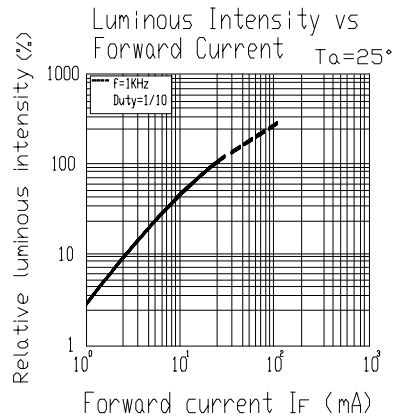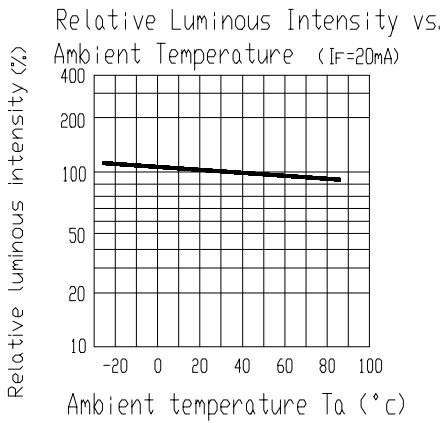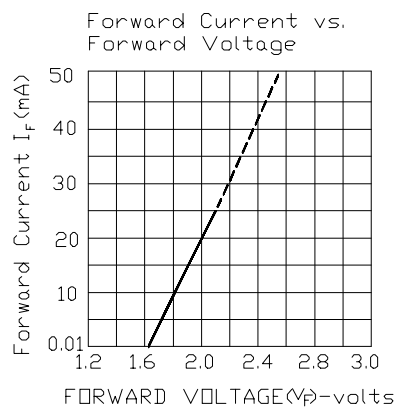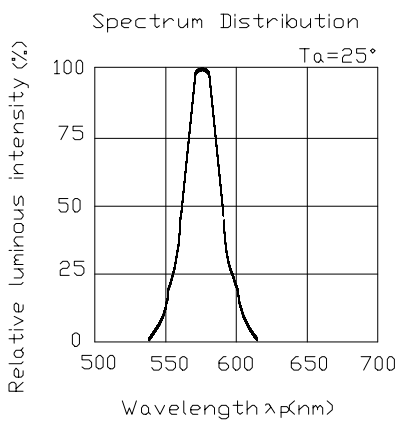



EVERLIGHT ELECTRONICS CO.,LTD.

Device Number : CDAE-021-042 REV.: 1

PART NO. : A214B/SYGC/F182-53-R ECN : Page: 6 / 6

■ Reliability test items and conditions

NO	Item	Test Conditions	Test Hours/Cycle	Sample Size	Ac/Re
1	Solder Heat	TEMP : 260°C ± 5 °C	5 SEC	76 PCS	0/1
2	Temperature Cycle	H : +85°C 30min ∫ 5 min L : -55°C 30min	50 CYCLES	76 PCS	0/1
3	Thermal Shock	H : +100°C 5min ∫ 10 sec L : -10°C 5min	50 CYCLES	76 PCS	0/1
4	High Temperature Storage	TEMP : 100°C	1000 HRS	76 PCS	0/1
5	Low Temperature Storage	TEMP : -55°C	1000 HRS	76 PCS	0/1
6	DC Operating Life	TEMP : 25°C IF =20mA	1000 HRS	76 PCS	0/1
7	High Temperature / High Humidity	85°C/85% RH	1000 HRS	76 PCS	0/1