


DO-35 Lead Tape Packaging Standards


| REEL      | Reel Size | Box       | Box Size(mm) | Carton     | Carton Size(mm) | G.W.(kg) |
|-----------|-----------|-----------|--------------|------------|-----------------|----------|
| 5,000 pcs | 985 inch  | 5,000 pcs | 203×203×195  | 50,000 pcs | 438×438×220     | 7.5      |

52mm intermediate box: 260mm x 76mm x 122mm

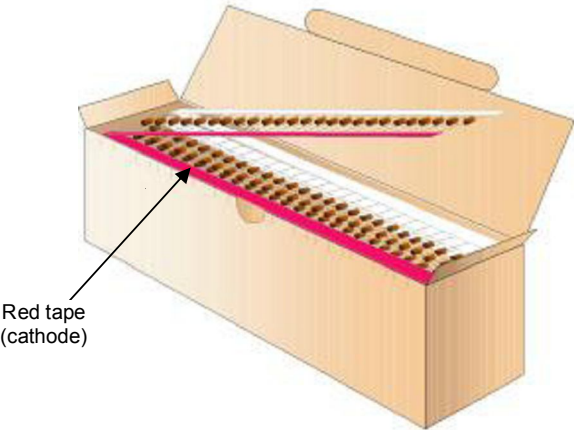

| Package Type    | Quantity Per Ammo Box | Device Suffix |
|-----------------|-----------------------|---------------|
| DO-35 ( T58/B ) | 5,000 pcs             | TB            |

Taping Dimensions

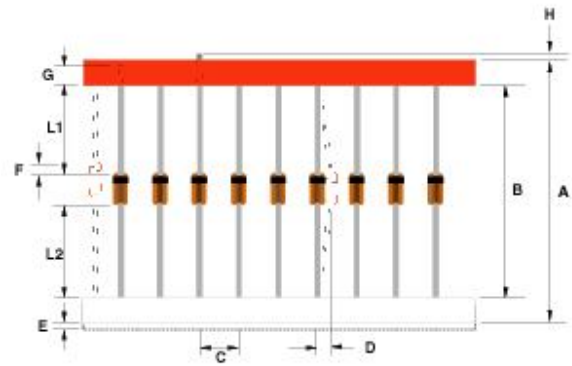

| Description            | Millimeters |            |
|------------------------|-------------|------------|
| Standard Width         | 52          | 26         |
| Tape Spacing (B)       | 52.0~53.5   | 25.5~26.5  |
| Component Pitch (C)    | 5.00±0.50   | 5.00±0.50  |
| Untaped Lead (L1 – L2) | ±1.4(max)   | ±1.0(max)  |
| Bent (D)               | 2.0(max)    | 1.0(max)   |
| Tape Mismatch (E)      | 0.75 Max    | 0.75 Max   |
| Glass Offset (F)       | ±1.4(max)   | ± 1.0(max) |
| Taped Lead (G)         | 3.0(min)    | 3.0(min)   |
| Lead Beyond Tape (H)   | 0           | 0          |