

# HIGH VOLTAGE SILICON RECTIFIER

R1200F THRU R5000F


VOLTAGE RANGE 1200 to 5000 Volts  
CURRENT 0.2 - 0.5 Amperes

## FEATURES


- Fast switching
- Low leakage
- High surge capability
- High current capability
- High temperature soldering guaranteed:  
260°C/10 seconds. 0.375" (9.5mm) lead length  
at 5lbs. (2.3kg) tension.

## MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V - 0 rate flame retardant
- Polarity: Color band denotes cathode end.
- Lead: Plated slug, solderable per MIL - STD 202 E  
method 208C
- Mounting position: Any
- Weight: 0.012 ounce, 0.33grams (DO-41)  
0.014 ounce, 0.39 grams (DO-15)

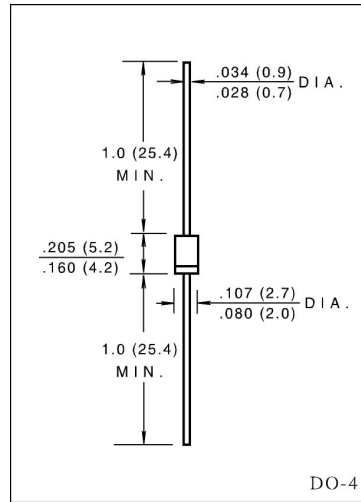

(R1200F - R2000F)

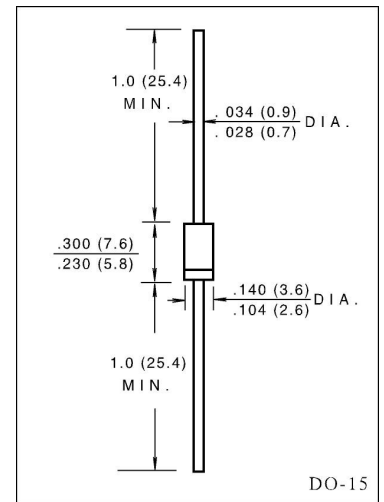

(R2500F - R5000F)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single phase, half wave, 60Hz, resistive or inductive load.
- For capacitive load derate current by 20%

	SYMBOLS	R1200F	R1500F	R1800F	R2000F	R2500F	R3000F	R4000F	R5000F	UNIT
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	1200	1500	1800	2000	2500	3000	4000	5000	Volts
Maximum RMS Voltage	$V_{RMS}$	840	1050	1260	1400	1750	2100	2800	3500	Volts
Maximum DC Blocking Voltage	$V_{DC}$	1200	1500	1800	2000	2500	3000	4000	5000	Volts
Maximum Average Forward Rectified Current, 0.375" (9.5mm) Lead length at $T_A = 50^\circ C$	$I_{(AV)}$	500				200				mA
Peak Forward Surge Current 8.3ms single half sine - wave superimposed on rated load (JEDEC method )	$I_{FSM}$	30								Amps
Maximum Instantaneous Forward Voltage Drop at 0.5A / 0.2A	$V_F$	2.5			6.0		5.0	6.5		Volts
Maximum DC Reverse Current at rated DC blocking voltage $T_A = 25^\circ C$	$I_R$	5.0								$\mu A$
Maximum Full Load Reverse Current, full cycle average 0.375" (9.5mm) lead length at $T_A = 55^\circ C$	$I_{R(AV)}$	100								
Maximum Reverse Recovery Time (Note 1)	$t_{rr}$	500								nS
Operating and Storage Temperature Range	$T_J, T_{STG}$	(-65 to +150)								$^\circ C$

## NOTES:

1. Test condition :  $I_F = 0.5A, I_R = 1.0A, I_{rr} = 0.25A$

# HIGH VOLTAGE SILICON RECTIFIER

## RATINGS AND CHARACTERISTIC CURVES R1200F THRU R5000F

FIG.1-TYPICAL FORWARD CURRENT DERATING CURVE

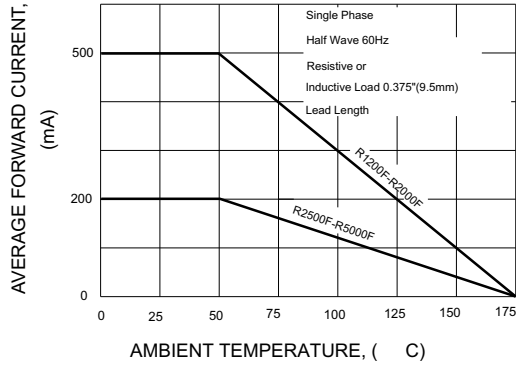


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

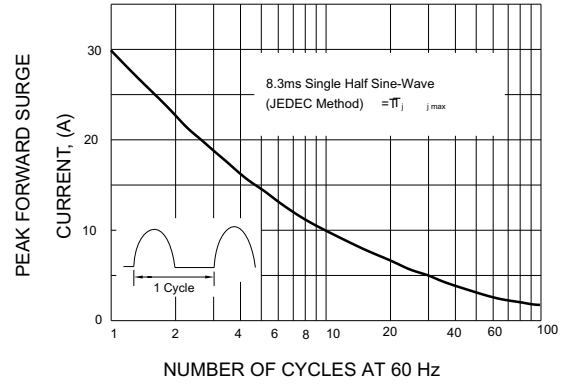


FIG.3-TYPICAL REVERSE CHARACTERISTICS

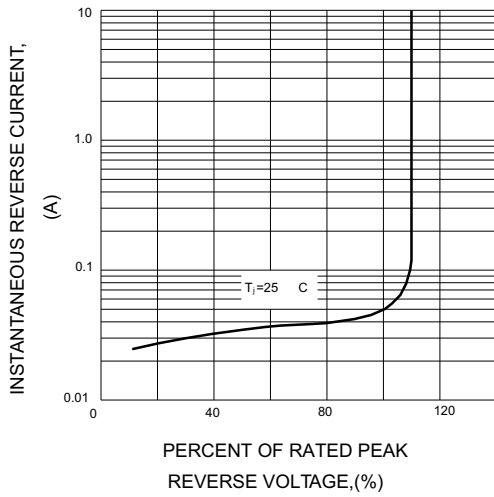


FIG.4-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

