

S2W


SURFACE MOUNT GENERAL RECTIFIER

Reverse Voltage - 1600 Volts

Forward Current - 2.0 Amperes

SMB

DO-214AA

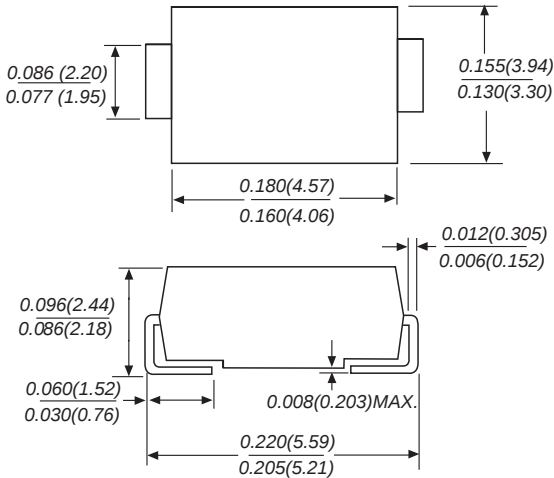

Dimensions in inches and (millimeters)

FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ For surface mounted applications
- ◆ Low reverse leakage
- ◆ Built-in strain relief, ideal for automated placement
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed: 250°C/10 seconds at terminals

MECHANICAL DATA

Case: JEDEC DO-214AA molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight : 0.09 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	S2W	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	1600	VOLTS
Maximum RMS voltage	V_{RMS}	1120	VOLTS
Maximum DC blocking voltage	V_{DC}	1600	VOLTS
Maximum average forward rectified current at $T_L=55^{\circ}C$	$I_{(AV)}$	2.0	Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	50.0	Amps
Maximum instantaneous forward voltage at 2.0A	V_F	1.15	Volts
Maximum DC reverse current $T_A=25^{\circ}C$ at rated DC blocking voltage $T_A=100^{\circ}C$	I_R	5.0 50.0	μA
Typical junction capacitance (NOTE 1)	C_J	30.0	pF
Typical thermal resistance (NOTE 2)	R_{qJA}	50.0	$^{\circ}C/W$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +175	$^{\circ}C$

Note: 1. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

2. P.C.B. mounted with 0.2x0.2" (5.0x5.0mm) copper pad areas

RATINGS AND CHARACTERISTIC CURVES S2W

