



VIEWING DIRECTION

NOTE:

1. DISPLAY TYPE: FSTN/POSITIVE
2. POLARIZER MODE: TRANSMISSIVE
3. VIEWING DIRECTION: 6 O'CLOCK
4. OPERATING VOLTAGE: VDD=3.0V; VOP=9.2V
5. DRIVE METHOD: 1/65 DUTY; 1/9 BIAS
6. OPERATING TEMP: 0°C TO +50°C
7. STORAGE TEMP: -10°C TO +60°C
8. DISPLAY DRIVER: SPLC502B
9. BACK LIGHT: NO
10. UNSPECIFIED TOLERANCE IS ±0.20MM
11. ROHS REQUEST

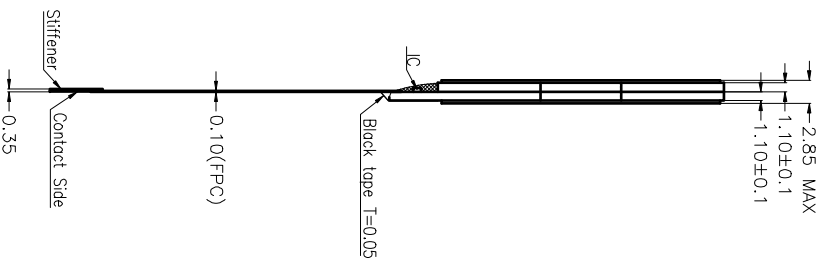

PIN Name
1 NC
2 CS
3 RST
4 A0
5 RW
6 RD
7 D0
8 D1
9 D2
10 D3
11 D4
12 D5
13 D6
14 D7
15 VDD
16 VSS
17 VOUT
18 C1N
19 C1P
20 C2N
21 C2P
22 V1
23 V2
24 V3
25 V4
26 V0
27 C86
28 PS

深圳市荣鑫凯电子科技有限公司

第三规格:



产品型号:	HDDH-HY1326501-01		确认:	
部品型号:	LCD外形图		审核:	
版本:	00	单位:	MM	
日期:	2010.12.21	比例:	1:1	设计:
版本:	更改内容	数量:	日期:	审核:
UNMRKED	TOLERANCE: ±0.20 mm	比例:	1:1	日期: