


□ 60

Axial fan

× 60 × 25mm

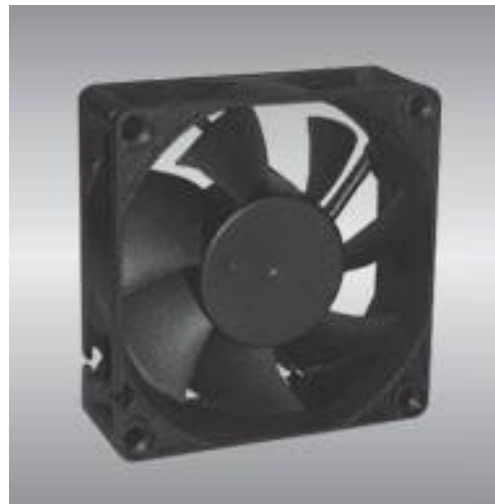

General Specifications

- Motor : 4 Poles brushless DC motor
- Frame & Impeller : Plastic (UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

品牌	轴承	电压	启动电压	频率	电流	功率	转速	风量	静压	燥音		
型号	B/S	V	V	HZ	A	W	RPM	m3/min	CFM	mm-H2O	In-H2O	dba
SP60B22L-25AL	B/S	110/220	98/264	50/60	0.03	2.00	3000	0.39	13.80	2.30	0.09	24.0
SP60B22M-25AL	B/S	110/220	98/264	50/60	0.04	3.00	4000	0.51	18.30	4.20	0.16	30.0
SP60B22H-25AL	B/S	110/220	98/264	50/60	0.05	4.00	5500	0.71	25.20	6.50	0.25	37.0

*Bearing system B: Two Ball Bearing S: Sleeve Bearing

