

60 SPseries

x60x30mm





General Specifications

- Motor : 4 Poles brushless DC motor
- Frame & Impeller : Plastic(UL 94V-0)
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

| Model | *Bearing System | Rated Voltage | Operating Voltage Range | Rated Current | Rated Speed | Maximum Air Flow | Maximum Static Pressure | Sound Level | Weight | | |
|-------------|-----------------|---------------|-------------------------|---------------|-------------|---------------------|-------------------------|---------------------|---------------------|------|-----|
| Part NO. | B / S / F | V | V | A | RPM | m ³ /min | CFM | mm-H ₂ O | In-H ₂ O | dBA | g |
| SP603B P12I | B / S | 12 | 7.0-13.2 | 0.60 | 8000 | 1.22 | 43.1 | 22.9 | 0.90 | 51.0 | 145 |
| SP603B P24I | B / S | 24 | 14.0-26.4 | 0.23 | 8000 | 1.22 | 43.1 | 22.9 | 0.90 | 51.0 | 145 |
| SP603B P48I | B / S | 48 | 28.0-56.0 | 0.18 | 8000 | 1.22 | 43.1 | 22.9 | 0.90 | 51.0 | 145 |
| SP603B P12J | B / S | 12 | 7.0-13.2 | 0.90 | 9000 | 1.41 | 50.0 | 30.0 | 1.18 | 53.5 | 145 |
| SP603B P24J | B / S | 24 | 14.0-26.4 | 0.27 | 9000 | 1.41 | 50.0 | 30.0 | 1.18 | 53.5 | 145 |
| SP603B P48J | B / S | 48 | 28.0-56.0 | 0.20 | 9000 | 1.41 | 50.0 | 30.0 | 1.18 | 53.5 | 145 |
| SP603B P12L | B / S | 12 | 7.0-13.2 | 1.28 | 10000 | 1.52 | 55.2 | 35.8 | 1.41 | 57.0 | 145 |
| SP603B P24L | B / S | 24 | 14.0-26.4 | 0.38 | 10000 | 1.52 | 55.2 | 35.8 | 1.41 | 57.0 | 145 |
| SP603B P48L | B / S | 48 | 28.0-56.0 | 0.22 | 10000 | 1.52 | 55.2 | 35.8 | 1.41 | 57.0 | 145 |
| SP603B P12M | B / S | 12 | 7.0-13.2 | 1.80 | 12000 | 1.90 | 67.3 | 52.6 | 2.07 | 61.8 | 145 |
| SP603B P24M | B / S | 24 | 14.0-26.4 | 0.50 | 12000 | 1.90 | 67.3 | 52.6 | 2.07 | 61.8 | 145 |
| SP603B P48M | B / S | 48 | 28.0-56.0 | 0.25 | 12000 | 1.90 | 67.3 | 52.6 | 2.07 | 61.8 | 145 |

*Bearing system: B: Two Ball Bearing F: Fluid Bearing S: Sleeve Bearing

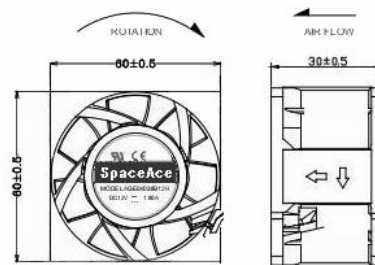

SpaceAce

www.gbf-fan.com