





1. ALL DIMENSIONS ARE IN mm WITH ± 0.20 TOLERANCE UNLESS OTHERWISE SPECIFIED
2. VIEWING ANGLE: 6:00 O'CLOCK
3. POLARIZER TYPE: TRANSFLECTIVE, POSITIVE
4. DISPLAY TYPE: FSTN
5. LCD OPERATING VOLTAGE: 7.0V
6. DRIVE MOKE: 1/33 DUTY, 1/6 BIAS
7. OPERATING TEMPERATURE: -10 至 +60
8. STOPAGE TEMPERATURE: -20 至 +70
9. CONNECTOR: COG ST7565P

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
SYMBOL	NC	CS1B	CS2	RESB	A0	WR (R/W)	RDBCE	D0	D1	D2	D3	D4	D5	D6	D7	VDD
PIN	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32
SYMBOL	VSS	VOUT	NC	CAP3P	CAP1N	CAP1P	CAP2P	CAP2N	V4	V3	V2	V1	V0	VR	C86	NC

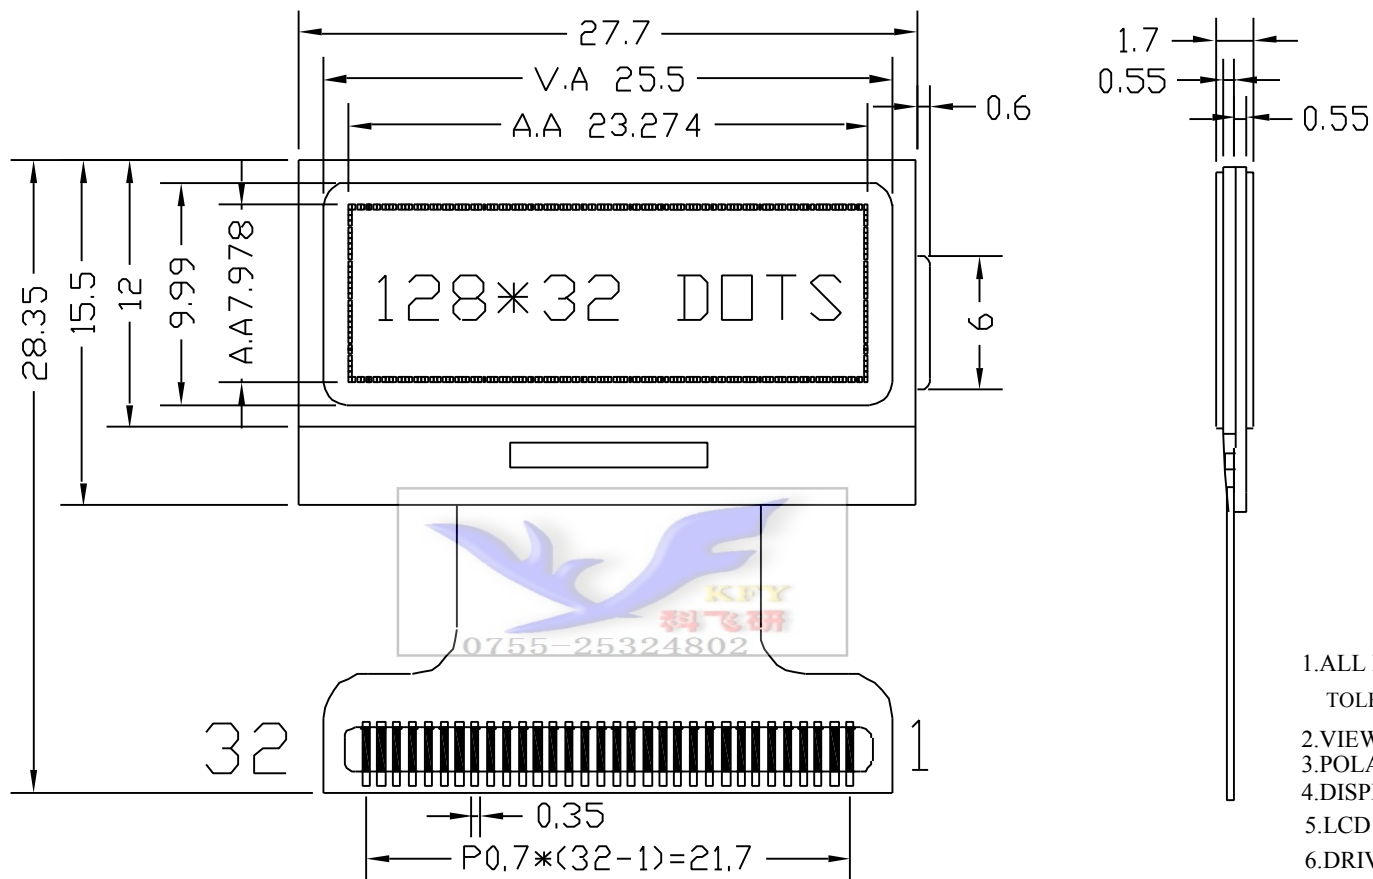

TEL : 0755-25324802 FAX : 0755-36808262

Dwg Title				- COG12832D			
Dwg No.				Date			
				2005-4-14			
Scale	Unit	Tol.					
	mm	± 0.2					
Drawn	Checked	Approved					
LIU							