


- NOTES:
1. DISPLAY TYPE: SYN/POSITIVE-G MODE
  2. VIEWNG DIRECTION: 6 O'CLOCK
  3. DRIVE METHOD: 1/6SDUTY 1/9BAS.
  4. ICMOPERATING VOLTAGE: 3.0 V
  5. OPERATING TEMP: -10° C ~ 60° C.
  6. STORAGE TEMP: -20° C ~ 70° C.
  7. CONNECTOR CODE: (I.C.:ST7565)

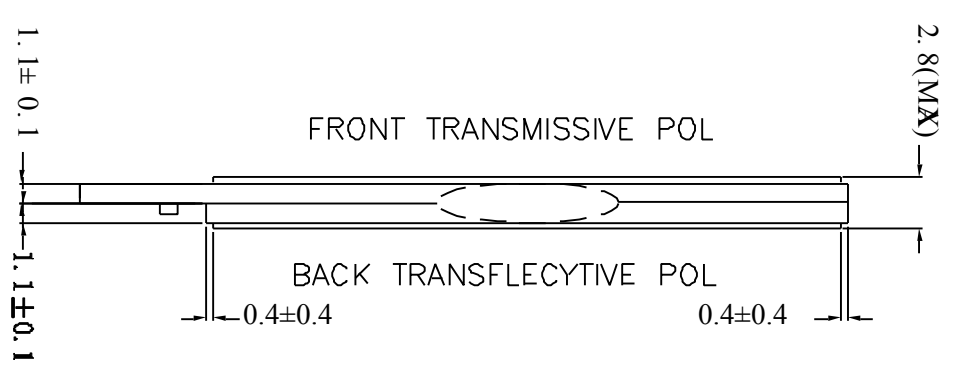

1	NC
2	CL
3	CS1
4	RES
5	A0
6	R/W(WR)
7	E(RD)
8	DB0
9	DB1
10	DB2
11	DB3
12	DB4
13	DB5
14	DB6
15	DB7
16	VDD
17	VSS
18	VOOUT
19	C3P
20	C1N
21	C1P
22	C2P
23	C2N
24	VRS
25	V4
26	V3
27	V2
28	V1
29	V0
30	VR
31	CLS
	C86
	P/S
34	33/32/HpW
35	IRS
36	NC

Customer's Approval With Signature And Drop  
 Approved By: \_\_\_\_\_ Date: \_\_\_\_\_

**TG12864R**

DRAWING TITLE: \_\_\_\_\_  
 DRAWING NUMBER: \_\_\_\_\_  
 DW: CHEN TEL: 0755-33671719  
 DATE: 2007-01-05 FAX: 0755-33671720  
 SCALE: \_\_\_\_\_ REV: 00 SHEET: 1 OF 3