


No.	Pin Name	Terminal
1	VSS	
2	VDD	
3	NC	
4	A0	
5	NC	
6	NC	
7	SCLK	
8	DATA	
9	/RES	
10	NC	
11	NC	
12	NC	
13	NC	
14	NC	
15	/CS	
16	NC	
17	NC	
18	NC	
19	BLK	
20	BLA	

- Specifications:
- 1> LCD Display Type : STN-Y/G,Positive,
  - 2> Polarizer : Transmissive
  - 3> Viewing Direction : 6 D/CLOCK
  - 4> Drive Method : 1/64Duty; 1/9Bias
  - 5> Operating Voltage : VDD=3.3V/or 5.0V
  - 6> Operating Temperature : -10°C~60°C
  - 7> Storage Temperature : -20°C~70°C
  - 8> Controller/Driver IC : ST7565
  - 9> Backlight : Yellow or Green LED, 20mA~30mA

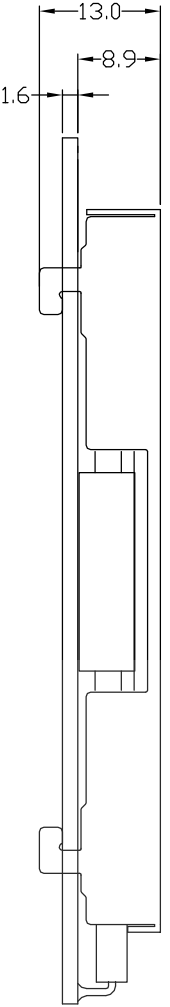

Backlight Circuit

Customers Approval With Signature And Chop  
Approved By \_\_\_\_\_ Date \_\_\_\_\_



Dwg Title		COG12864TM-093B		REV		01	
Scale	Unit	Tol.	Dwg No.	Date	Scale	Unit	Tol.
	mm	±0.2	05312210	2012-05-31			
Drawn	Checked	Approved	Date				
LMX			2012-05-31				

