


FPC接口

1	NC	16	WR0
2	VLCD	17	RST
3	VS+	18	D0
4	VS-	19	D1
5	VB0-	20	D2
6	VB1-	21	D3
7	VB1+	22	D4
8	VB0+	23	D5
9	VDD	24	D6
10	VSS	25	D7
11	TST4	26	D8
12	BMO	27	D13
13	CS0	28	D15
14	CD	29	NC
15	WR1		

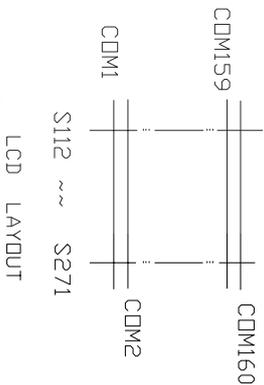

COG160160C002

Specification:

- 1). Driving: Duty:1/160, Bias:1/10, Vop: 16.5V
- 2). Viewing Direction: 6 O'clock
- 3). Display mode: FSTN/Transflective/Positive
- 4). Operating temp: -20°C~+70°C
- 5). Storage temp: -30°C~+80°C
- 6). Drive IC: UC1698U
- 7). Dimensions with mark "*" are important, with mark "(") are referenced
- 8). All materials must meet for RoHS

