
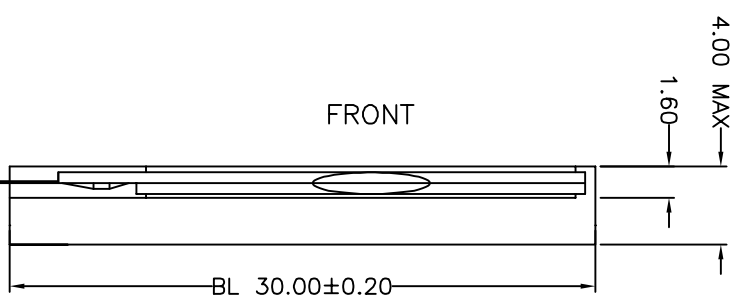


REV.	DESCRIPTION	DATE
------	-------------	------

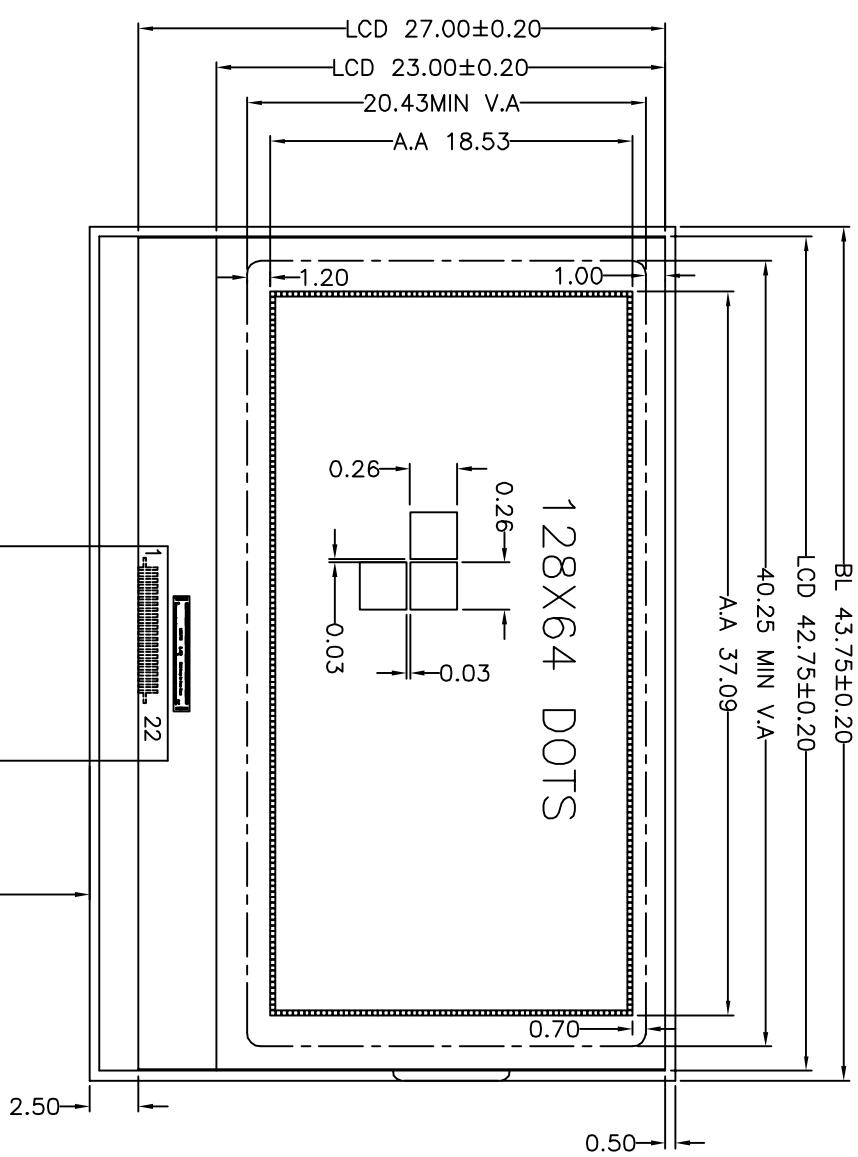


**SPECIFICATIONS**

FRONT POLARIZER : TRANSMISSIVE,ADHESIVE  
 BACK POLARIZER : TRANSPARENT,ADHESIVE  
 STORAGE TEMP : -20°C TO +70°C  
 OPERATING TEMP : -10°C TO +60°C  
 VIEWING DIRECTION : 6 O'CLOCK  
 DRIVE CONDITION : 1/64DUTY, 1/9BIAS, 9V  
 DISPLAY MODE : FSTN, POSITIVE MODE  
 CUSTOMER P/N :  
 MKT P/N:  
 CONNECTOR:  
 DRIVE IC:

COG FPC  
 UC1701 and COMPATIBLE

VIEWING DIRECTION

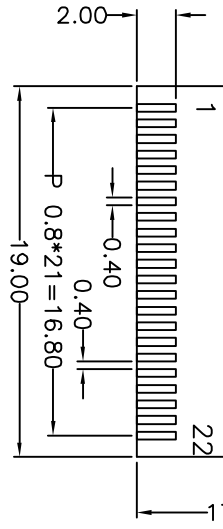

SHEET: 1/2

GENERAL TOL.	UNITS
TOL. MM	MM

APPROVALS	DATE
DWN MODEL 10/APR	
CHK MODEL 10/APR	
APP MODEL 10/APR	


MODEL NUMBER : TLC12864-6798A	DO NOT SCALE THIS DRAWING	PROJECTION	DATE: 10-APR-2009
----------------------------------	---------------------------	------------	----------------------

Connection copper


Connection copper

# 接口定义:

PIN	DESC
1	CS0
2	RST
3	CD
4	WR0
5	WR1/RD
6	D0
7	D1
8	D2
9	D3
10	D4
11	D5
12	D6/SCK
13	D7/SDA
14	VDD
15	VSS
16	VB0+
17	VB0- DUMMY
18	VB1-
19	VB1+
20	VLCDIN/V0
21	BM0
22	BM1

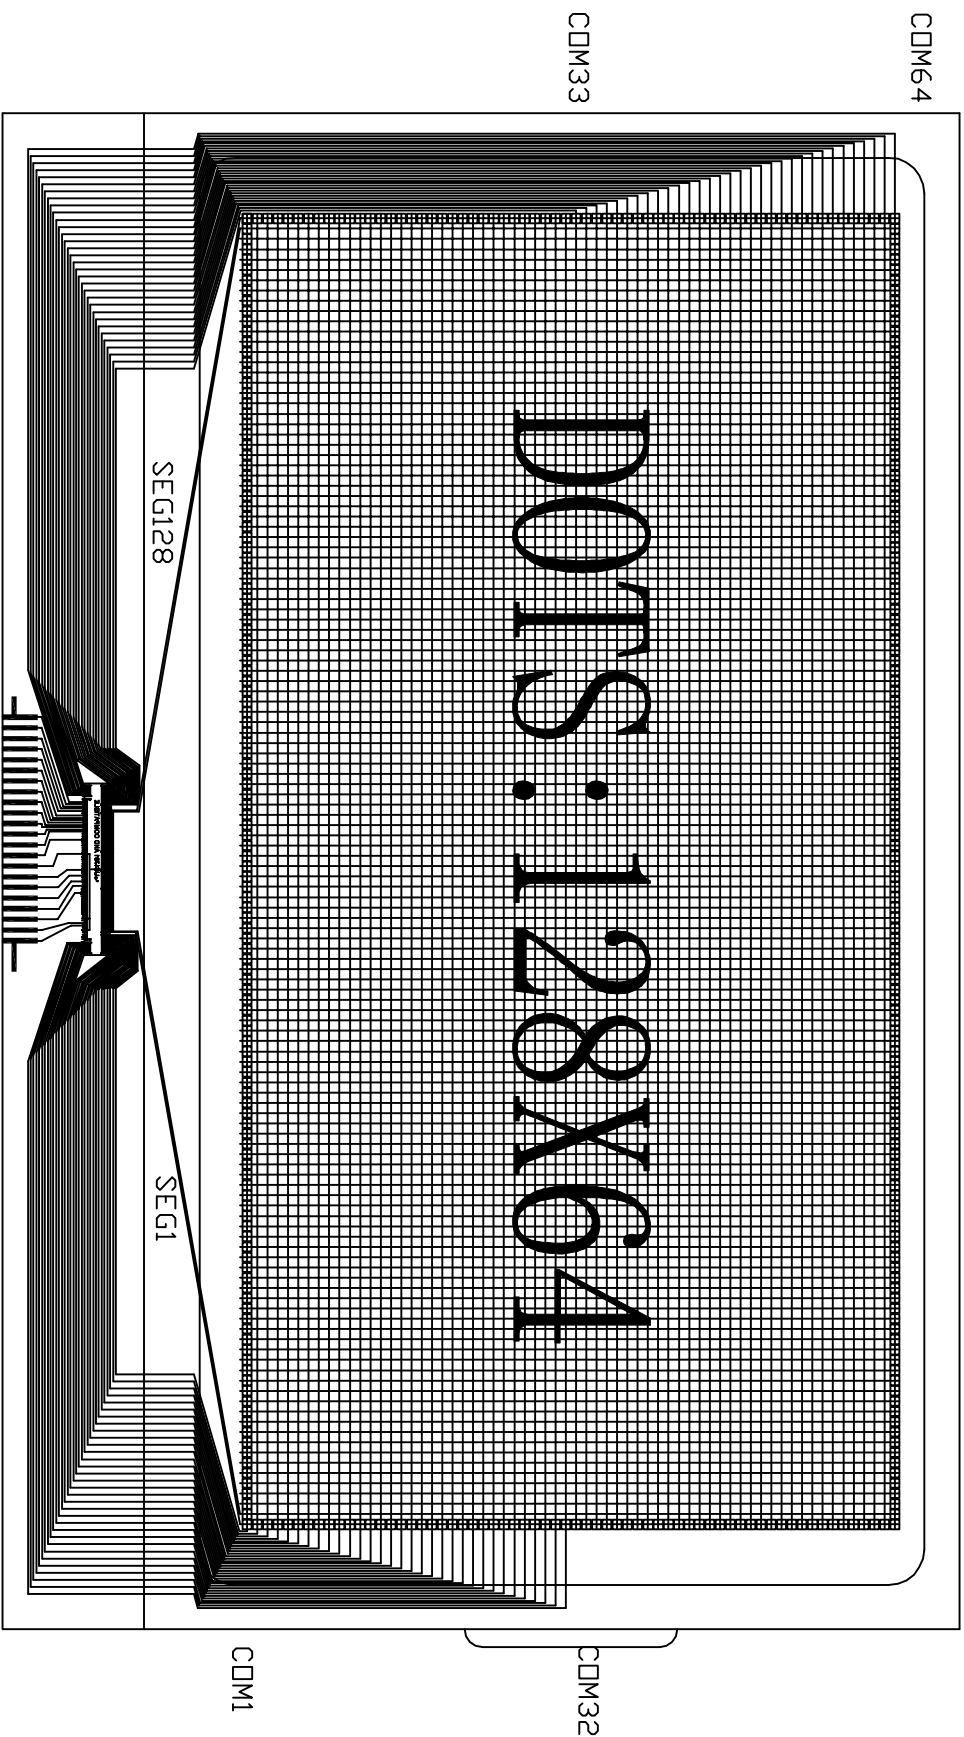

Cvb0A 2.2uF 2V  
 Cvb1A 2.2uF 2V  
 Cvlcd 1uF 25V

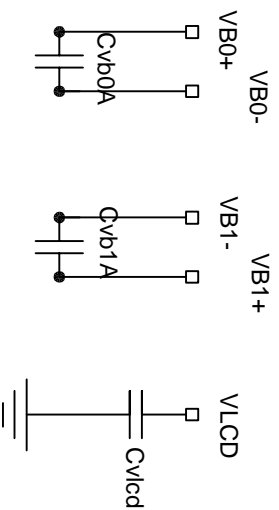

1  
22

SHEET: 1/2		MODEL NUMBER :		DATE:	
GENERAL TOL.	UNITS	TLC12864-6798A		10-APR-2009	
TOL MM	MM				
APPROVALS	DATE				
DWN MODEL	10/APR				
CHK MODEL	10/APR				
APP MODEL	10/APR	DO NOT SCALE THIS DRAWING.		PROJECTION	