


REV.	DESCRIPTION	DATE
------	-------------	------

FPC接口定义:

PIN	DESC	PIN	DESC
1	CS0	11	VB0+
2	RST	12	VB0-
3	CD	13	VB1-
4	NC	14	VB1+
5	D6/SCL	15	NC
6	D7/SDA	16	NC
7	VDD	17	NC
8	VSS	18	NC
9	VLCD	19	NC
10	NC	/	/

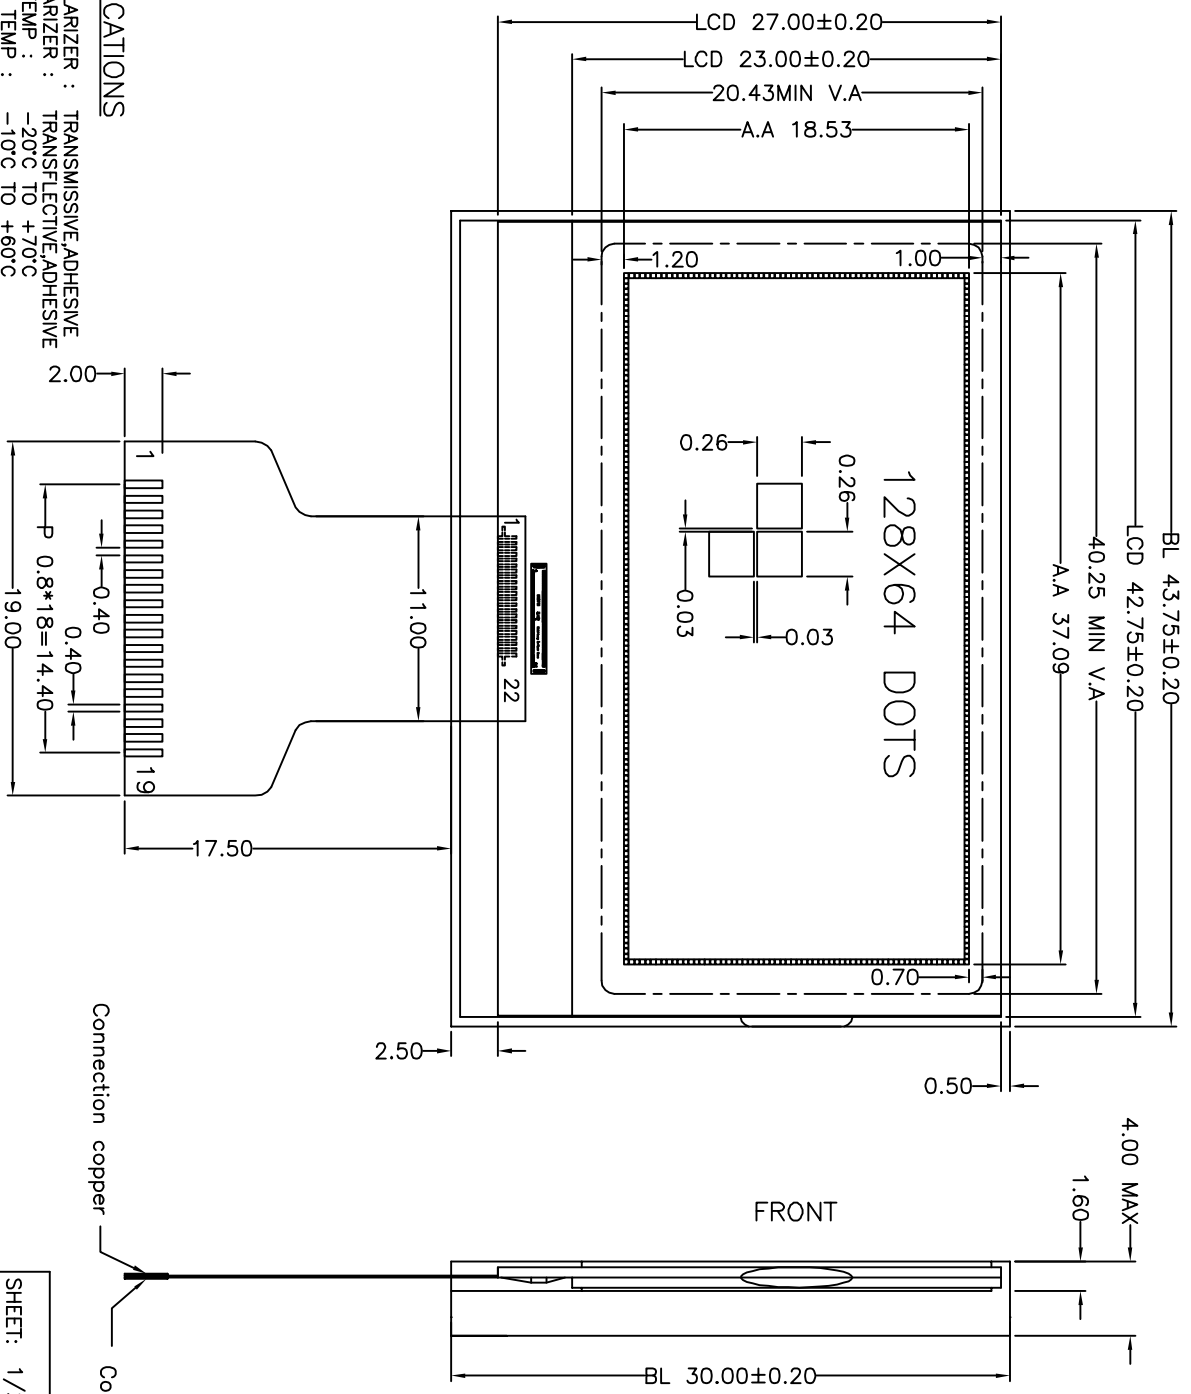

SPECIFICATIONS

FRONT POLARIZER : TRANSMISSIVE/ADHESIVE
 BACK POLARIZER : TRANSPARENT/ADHESIVE
 STORAGE TEMP : -20°C TO +70°C
 OPERATING TEMP : -10°C TO +60°C
 VIEWING DIRECTION : 6 O'CLOCK
 DRIVE CONDITION : 1/64DUTY, 1/9BIAS, 9V
 DISPLAY MODE : FSTN, POSITIVE MODE
 CUSTOMER P/N :
 MKT P/N:
 CONNECTOR:
 DRIVE IC:

COG FPC
 UC1701 and COMPATIBLE

VIEWING DIRECTION

SHEET: 1/2		GENERAL TOL		UNITS	
TOL		MM		MM	
APPROVALS	DATE	MODEL NUMBER :			
DWN MODEL	10/APR	TLC12864-6798AS			
CHK MODEL	10/APR	DO NOT SCALE THIS DRAWING		PROJECTION	
APP MODEL	10/APR	TEL:0755-25324802		FAX:0755-25324802	
		DATE:		10-APR-2009	