


14 7 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100

Revision	Disposition	Date	Signed
V.1	首次出图	2015.07.23	ZWJ

FPC INTERFACE


No.	Symbol
1	LEDK
2	LEDK
3	GND
4	GND
5	FMARK
6	SDA
7	WR
8	RS
9	CS
10	RESET
11	IOVCC18
12	IOVCC18
13	VCC28
14	VCC28
15	GND
16	GND
17	NC
18	NC
19	NC
20	NC
21	NC
22	NC
23	LEDA
24	LEDA

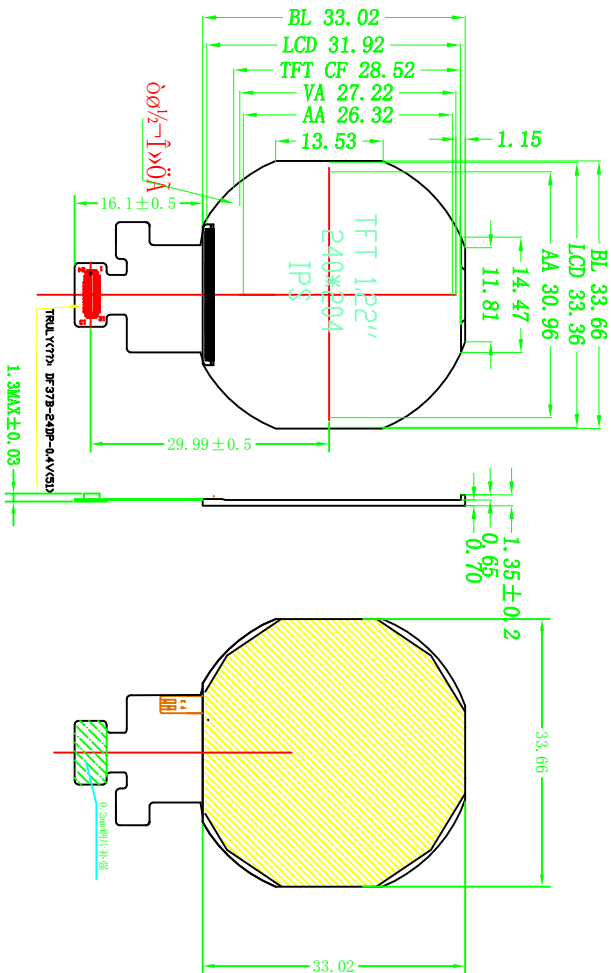

3 line SPI interface-2DATA

NOTES:

1. DISPLAY TYPE: 1.22" TFT, TRANSMISSIVE
2. DRIVER IC: ST7789H2 & Compatible LDI
3. VIEWING DIRECTION: IPS
4. BACKLIGHT: 2 CHIP-WHITE LED
5. BL INPUT CURRENT: VCC=2.8V, IOVCC=1.8V, Vled=3.2V (40mA)
6. OPERATING TEMP: -20°C ~ +60°C
7. STORAGE TEMP: -30°C ~ +70°C
8. GENERAL TOLERANCE: ±0.2



LED CIRCUIT:

深圳市中意微显示科技有限公司

Customer Ref.	Model No.	Drawing Title	Characteristics	
	ZWJ122002-A			
Part No.	Approve	Material	Unmarked Tolerance	Unit Scale
			±0.2	mm 1:1
Drawing No.	Checked	Date	Rev	Page
	Draw	2015.7.23		1 of