


REV. 001	DESCRIPTION	DATE
V3	更改LCD显示模式为半透正性以及FPC连接方式	2014-11-11

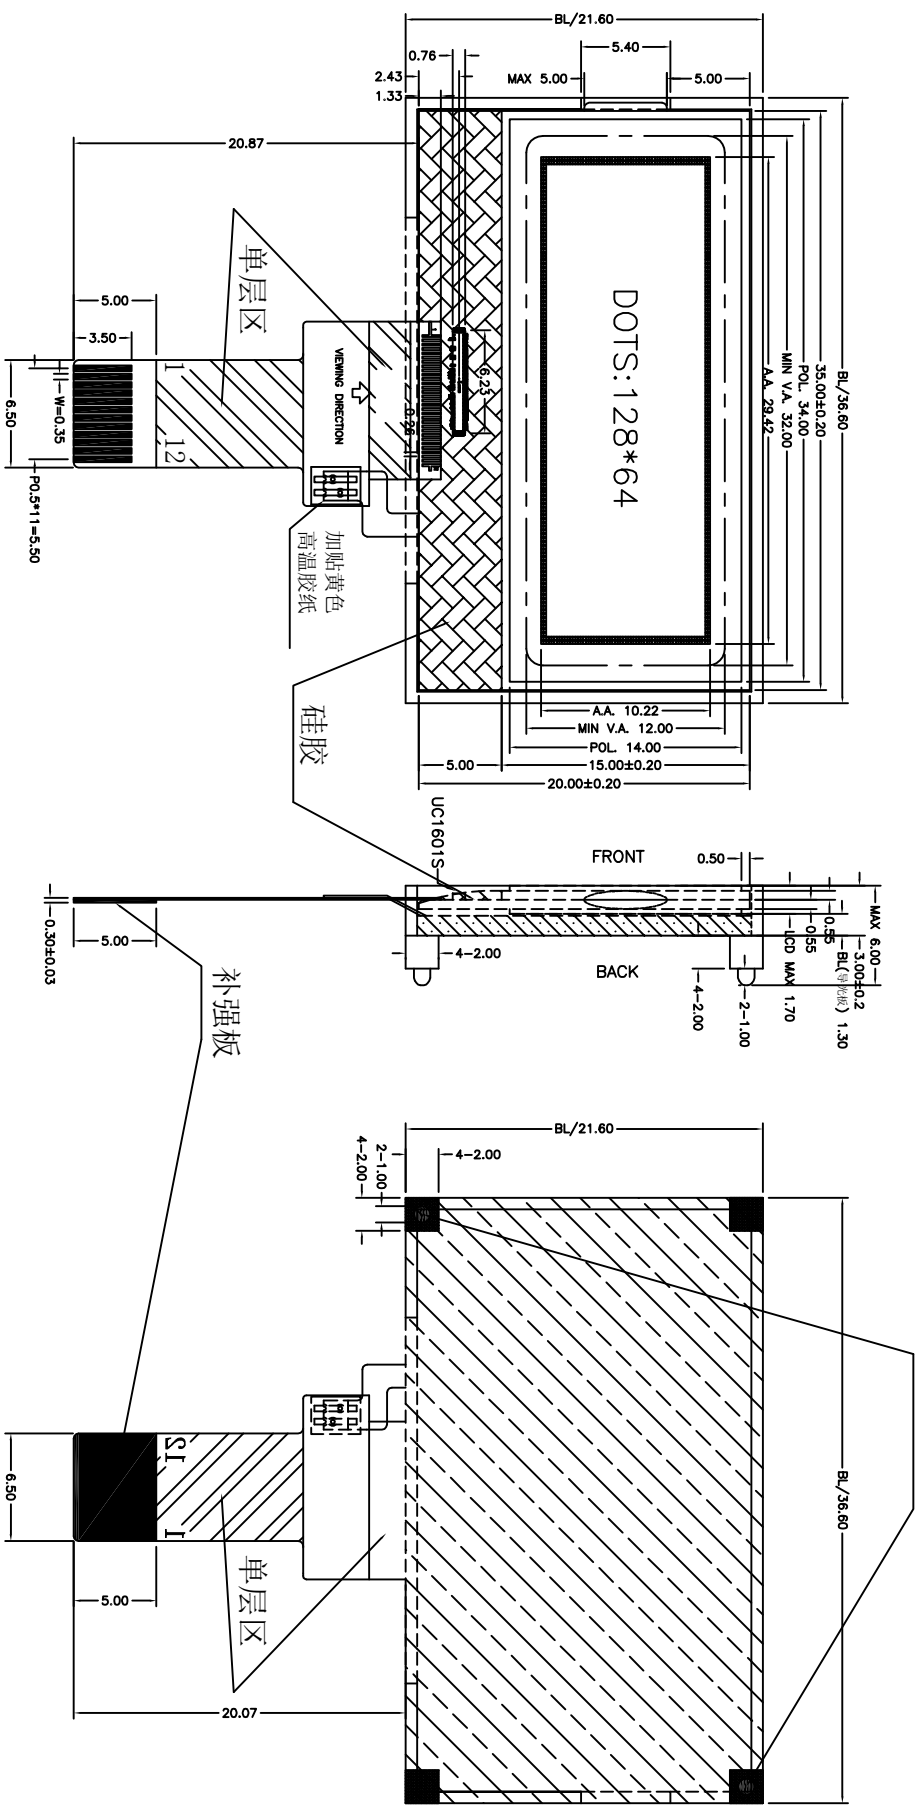

PIN	DESC
1	VLCD
2	VB0+
3	VB0-
4	VB1-
5	VB1+
6	VSS
7	VDD
8	D3
9	D0
10	RST
11	A
12	K

Backlight: WHITE VF=3.3V IF=30mA

SPECIFICATIONS

- FRONT POLARIZER : TRANSMISSIVE,ADHESIVE (34.00mm X 14.00mm)
- BACK POLARIZER : TRANSMISSIVE,ADHESIVE (34.00mm X 14.00mm)
- DISPLAY MODE : STN(Blue mode); Negative MODE
- DRIVE CONDITION : 1/64 DUTY 1/9 BIAS 9.0 V
- OPERATING TEMP : -10°C TO +60°C
- STORAGE TEMP : -20°C TO +70°C
- VIEWING DIRECTION : 6 O'CLOCK
- CUSTOMER P/N :
- CONNECTOR:

SCALE: N.T.S.		SHEET: 1 OF 3	
GENERAL TOL. 0.20 MM	UNITS MM	深圳市中意微显示科技有限公司	
APPROVALS	DATE	MODEL NUMBER : ZYWS00231-V3	
APP		DRAWING NO: 70462G	
CHK Z		DATE: 2014-11-4	

DO NOT SCALE THIS DRAWING. PROJECTION