

□ 254 × 89mm cooling fan





General Specifications

- Motor : 4 Poles brushless DC motor
- Frame & Impeller: Al die-casting & Plastic
- Storage temperature : -40° to +75°
- Operating temperature : -10° to +70°

Major Characteristic Parameters

品牌	轴承	电压	启动电压	电流	功率	转速	风量	静压	噪音		
型号	B/S	V	V	A	W	RPM	m3/min	CFM	mm-H ₂ O	In-H ₂ O	dba
SP255B12L-90DL	B	12	6.0~13.5	3.50	42.00	2000	16.00	565	16.40	0.65	63.8
SP255B24L-90DL	B	24	18.0~26.5	1.50	36.00	2000	16.00	565	16.40	0.65	63.8
SP255B48L-90DL	B	48	36.0~56.0	0.80	38.40	2000	16.00	565	16.40	0.65	63.8
SP255B24M-90DL	B	24	18.0~26.5	2.90	69.60	2500	20.30	718	25.50	1.01	68.2
SP255B48M-90DL	B	48	36.0~56.0	1.80	86.40	2500	20.30	718	25.50	1.01	68.2
SP255B24H-90DL	B	24	18.0~26.5	4.80	115.20	3000	24.50	864	34.40	1.35	73.5
SP255B48H-90DL	B	48	36.0~56.0	2.60	124.80	3000	24.50	864	34.40	1.35	73.5
SP255B48U-90DL	B	48	36.0~56.0	3.50	168.00	3500	30.00	1060	39.50	1.56	78.9

*Bearing system B: Two Ball Bearing

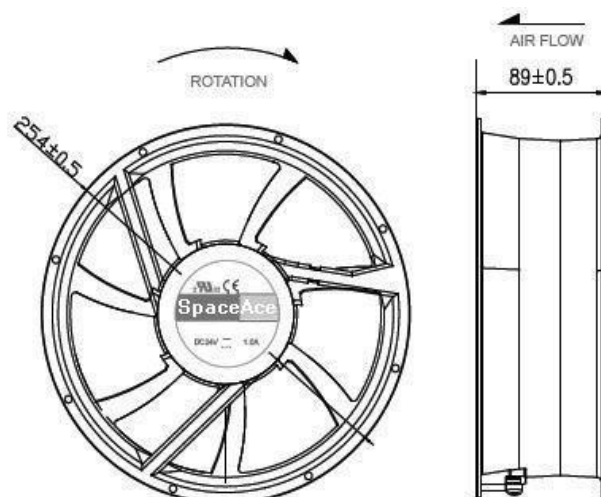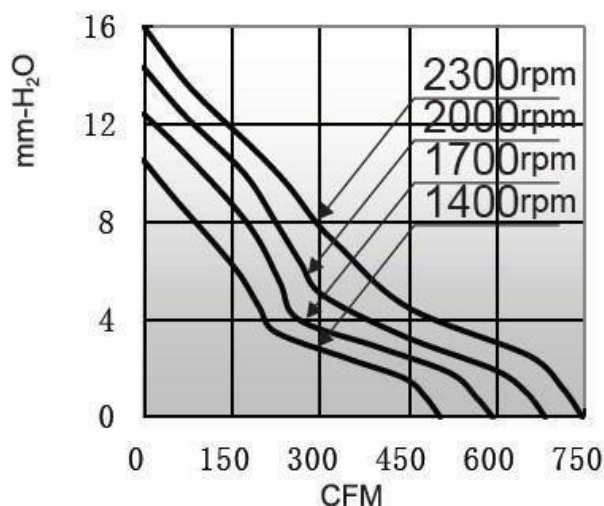

unit:mm